THE FUTURE OF ON SITE MACHINING

SERCO

ON-SITE MACHINING

Maintenance

Repair

Flanges - Valves







Portable Machine Tools:

Surfacing

Boring

Threading

Counterboring

Tapping

Resurfacing

Grinding

Conical machining



Your trusted partner for integrity assessment

THE FUTURE OF ON SITE MACHINING
SERCO

Increased Productivity

SERCO engineers and operators contribute to providing both preventive and corrective maintenance on flanges, safety, relief and other valves, sealing surfaces, engine blocks (diesel, gas, etc...) at their customer's job sites.


www.serco-tools.com


Range of SERCO machines

		1” 25,4 mm	8” 203 mm	16” 406 mm	24” 609 mm	32” 812 mm	40” 1016 mm	56” 1422 mm	72” 1828 mm	90” 2286 mm	120” 3048 mm
TU Series	TU 200										
	TU 400										
	TU 600										
	TU 1100										
	TU1200										
	TU1400										
	TU1800										
	TU2000										
	TU2400										
	TU2600										
	TU2800										
	TU3000										
	TU3200										
XP Series	XP400NG										
	XP600NG										
	XP900NG										
	XP1200										
	XP1800NG										
	XP2000NG										
	XP2200NG										
	XP2400NG										
	XP2600NG										
	XP2800NG										
	XP3000NG										
	XP3200NG										
MS Series	MS600										
	MS2300										
TA 240	TA240/100										
	TA240/120										
	TA240/170										
	TA240/220										







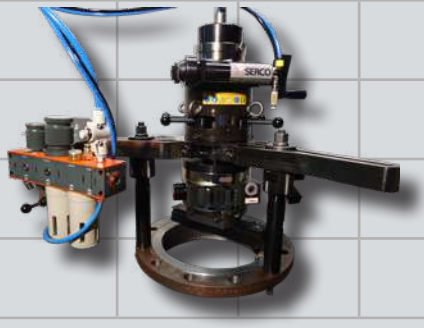

SERCO know-how

50 years of experience

SERCO machines represent the culmination of over 50 years of technical expertise, know-how and SERCO' S understanding of the key issues of their industrial partners throughout the world.

SERCO's major advantage lies in their ability to design equipment with total rigidity, which, enables machining to be done with accuracy to 0.01mm.

What makes SERCO machines unique and particularly adapted to on-site machining is illustrated by their ease of installation and set-up. To set-up a flange facing machine, adjustments need to be made in concentricity and parallelism. SERCO is the only manufacturer in the world capable of building equipment that enables these two set-up operations to be carried out totally independently.








The product range includes a large choice of portable machining equipment:

- Boring and surfacing machines
- Surfacing machines
- Grinding machines
- Threading machines
- Lapping machines
- Special machines



SERCO machines represent the best compromise between lightness, compact size, rigidity and precision. Their size and light weight will increase your on-site productivity, in terms of ease of use and reduction in operator hours. Because of their easy and quick installation, the operator dosimetry taking, the benefits on the planning, etc will be improved.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Your challenging projects need advanced solutions


SERCO machine tools are designed for the repair and maintenance of various components:

- Flanges
- Grooves
- Relief valves
- Safety valves
- Sealing valves
- High-pressure valves
- Dowel pin extraction
- External and internal threading
- Flat seats
- Conical seats
- Manholes
- Diesel / gas engine blocks
- RTJ grooves
- Etc.





Flange before machining

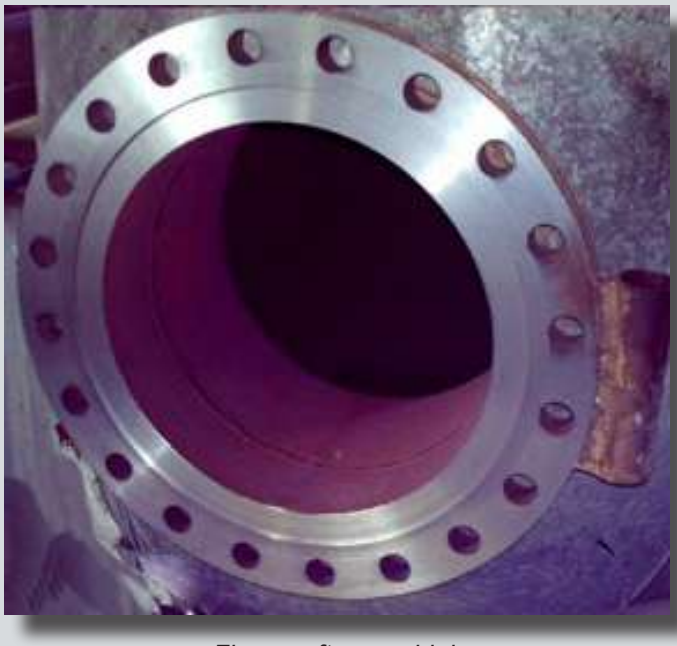


Flange after machining


Choosing a SERCO machine:

Surfacing

Difficult machining (machining overlay welding, deep machining, hard material)

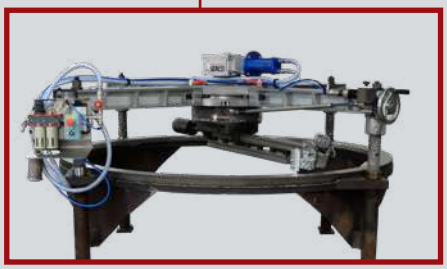

XP Machines



MS Machines


Surfacing + Boring



Depth between 0 and 70 mm (0 and 2.756")

Depth between 0 and 500 mm (0 and 19.685")

Depth between 0 and 500 mm (0 and 19.685") + 240 mm (9.449") in axial movement

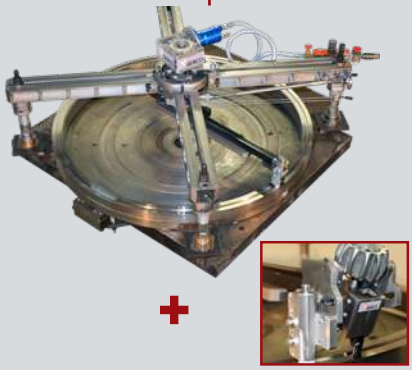

XP Machines + tilting head



TU Machines



TA Machines

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

SERCO: The high-performance solution

Simplicity

Rapid installation

Ease of use



Safety

Cold machining

No external moving parts



Accuracy

Machining accuracy to 0.01 mm (.0004”)

Surface finish to Ra 1.6



Reduction in operator hours

Higher productivity

Rapid, accurate set-up

Optimized handling



Contents


Portable Surfacing and Boring Machines for Flanges, Valves, Gas/Diesel Engines P. 10

TU200



P. 12

TU400



P. 13

TU600



P. 14

TU1100



P. 15

TU1200



P. 16

TU1400



P. 17

TU TE Series



P. 18

Larger Ø TU



P. 21

TA 240



P. 22

Portable Surfacing Equipment for Flanges and Valves P. 23

XP400NG



P. 25

XP600NG



P. 26

XP900NG



P. 27

XP1200



P. 28

XP1800NG



P. 29

XP2000NG



P. 30

XP2200NG




P. 31

Larger Ø XP



P. 33

MS 600 - MS 2300



P. 34

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Advanced Maintenance and Repair solutions

Other Machining Units P. 36

Facing Machines




P. 36

SBM1 Portable Boring Bar



P. 37

BDF 1100 Milling Unit



P. 38

Options and Accessories P. 39

FC 300



P. 40

FC 745



P. 40

FC 1150



P. 41

UR 40



P. 41

AC 38



P. 42

RTJ



P. 43

FSTG



P. 44

Tiltable head



P. 44

Examples of Applications P. 54

Machining a check Valve in a Nuclear Power Plant



P. 54

Ship-building



P. 55

Machining on a Tank in a Chemical Plant



P. 56

Maintenance in a Hydroelectric Power Plant



P. 57

Different types of Valves



P. 60

Flanges and Sealing Surfaces



P. 63

RTJ Metallic Ring Gaskets



P. 66

Tube and Pipeline Machining



P. 68

Special Machines



P. 70



SERCO TU Series

Portable Facing and Boring Equipment for Flanges and Valves

Possessing an axial and a radial movement, SERCO TU machines are designed for high-precision machining on flanges and valves. Like the whole range of SERCO machines, they use an outside clamping system surrounding the surface to be machined. With this type of clamping, associated with the axial movement of the TU machines, boring operations can be carried out inside the valves.

TU Series	Capacities
TU200	0 - 200 mm (0” – 7.87”)
TU400	0 - 400 mm (0” – 15.75”)
TU600	0 - 600 mm (0” – 23.62”)
TU1100	0 - 1100 mm (0” - 43.3”)
TU1200	0 - 1200 mm (0” - 47.2”)
TU1400	0 - 1400 mm (0” - 55.1”)
TU1800	0 - 1800 mm (0” - 70.8”)
TU2000	0 - 2000 mm (0” - 78.7”)
TU2200	0 - 2200 mm (0” - 86.6”)
TU2400	0 - 2400 mm (0” - 94.5”)
TU2800	0 - 2800 mm (0” - 110.2”)
TU3000	0 - 3000 mm (0” - 118.1”)
TU3200	0 - 3200 mm (0” - 125.9”)





Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Repair - Maintenance

Rapid Set-up

SERCO machines have been designed for use under extremely difficult and restrictive conditions. For this reason, parallelism and concentricity settings are independent: the SERCO TU machine is set up and ready for machining in just two stages. Independent settings mean that the flatness does not need to be readjusted after concentricity has been set. Machines can be adjusted easily. Once the machine is in position, set-up can be done effortlessly providing high levels of accuracy (0.01 mm).

Light and Compact

SERCO TU machines can be set up easily in extremely confined spaces and in all positions. Their light weight also means that they can be installed and used by a single operator.



Clamping in Position

SERCO TU machines are positioned and held in place by a column/arm system clamping the outside of the part to be machined. This gives them a wide zone of use from the center of the pipe up to its outside surface.

Precision

With an accuracy of 0.01 mm and a surface finish up to Ra 1.6, Serco TU series machines are the only machines that combine reduced size and weight, ergonomic design and wide capabilities, with ultra-high precision surface machining and/ or boring results.

TU series

Portable Facing and Boring Equipment

TU200

Ø 0 - 200 mm (0” – 7.87”)



Description:

The SERCO TU200 machine is the smallest model in the SERCO TU series. This versatile machine is equipped with manually controlled axial and radial feeds. With its compact size and light weight (15 kg (33 LB)), it can be used in very confined spaces, but still achieve an accuracy of 0.01 mm.

The machine can be used with the FC 300 chain system for clamping it securely onto the outside of the part to be machined.

Technical features:

Type	TU200
Facing Ø	0 – 200 mm (0“ - 7.87“)
Clamping Ø	100 – 290 mm (3.9“ - 11.4“)
Axial feed	70 mm (2.8“)
Radial feed	30 mm (1.2“)
Maximum drive motor power (at 6 bars)	120 Watt
Air supply pressure	5 – 7 (bar) 87 - 101 (psi)
Air-flow required	350 (l/min) (12.3 cfm)
Weight	≈ 15 kg (33 lbs.)



TU200 container size:

- Outside dimensions: 680 x 530 x 380 mm (26.7” x 20.8” x 14.9”)
- Weight: machine and accessories: ≈ 41 kg (90.38 LB)

Use On-Site or in Workshop:








ORDER NO.	DESCRIPTION
TU200-1000	Portable facing and boring machine with pneumatic motor – facing Ø: 0 - 200 mm (0” - 7.87”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Advanced Technology

TU400

Ø 0 - 400 mm (0” – 15.75”)

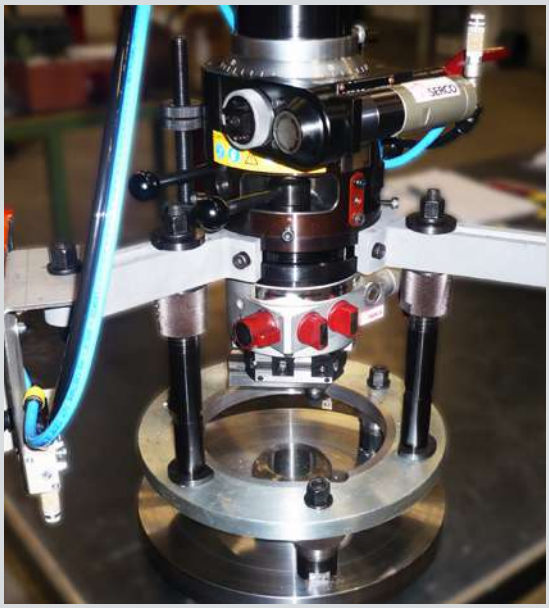

Description:

The SERCO TU400 is perfectly suitable for machining operations that need to be done by a single operator in a confined space.

While maintaining its precision of 0.01 mm, the TU400 is fitted with automatic or manual axial and radial feed movements.

This feature, compared with the TU200, enables it to work with a regular autonomous movement. The TU400 can also be used with the RTJ system to perform conical machining functions.

In order to machine a maximum surface, the TU400 can be held on an outside surface using the FC745 chain clamp.

Technical features:

Type	TU400
Facing Ø	0 – 400 mm (0” – 15.7“)
Clamping Ø	220 – 430 mm (8.6“ - 16.9“)
Axial feed	100 mm (3.94“)
Radial feed	40 mm (1.6“)
Maximum drive motor power (at 6 bars)	780 Watt
Air supply pressure	5 – 7 (bar) 87 - 101 (psi)
Air-flow required	1500 (l/min) (52.9 cfm)
Weight	≈ 35 kg (77 lbs.)



TU400 container size:

- Outside dimensions: 860 x 570 x 350 mm (53.8” x 22.4” x 13.7”)
- Weight: machine and accessories: ≈ 69 kg (158 LB)

Use On-Site or in Workshop:







ORDER NO.	DESCRIPTION
TU400-1000	Portable facing and boring machine with pneumatic motor – facing Ø: 0 - 400 mm (0” - 15.7”)
TU400E-1020	Portable facing and boring machine with electric motor – facing Ø: 0 - 400 mm (0” - 15.7”)

TU series

Portable Facing and Boring Equipment

TU600

Ø 0 - 600 mm (0” – 23.62”)



Description:

The TU600 is undoubtedly the most versatile machine in the SERCO range.

Its reduced weight 65 kg (143 LB), large capacity Ø 0 - 600 mm (23.62”) and high-precision machining (0.01 mm) mean that the machine is an uncontested leader in the world of onsite machining.

Moreover it provides the same advantages as the TU400, i.e. automatic or manual axial and radial feed movements and, therefore, it can be used with the “RTJ” system.

The TU600 can also be used with the FC 745 and does not require a special hoisting and handling system.

Technical features:

Type	TU600
Facing Ø	0 – 600 mm (0“ - 23.62“)
Clamping Ø	250 –720 mm (9.84“ - 28.4“)
Axial feed	135 mm (5.3“)
Radial feed	60 mm (2.4“)
Maximum drive motor power (at 6 bars)	780 Watt
Air supply pressure	5 – 7 (bar) 87 - 101 (psi)
Air-flow required	1500 (l/min) (52.9 cfm)
Weight	≈ 65 kg (143 lbs.)



TU600 container N° 1 size:
- Outside dimensions: 860 x 570 x 350 mm (33.8” x 22.4” x 13.7”)
- Weight: Machine and arms: ≈ 71 kg (156.5 LB)

TU600 container N° 2 size:
- Dimensions (extérieures): 860 x 570 x 350 mm (33.8” x 22.4” x 13.7”)
- Weight: Columns and accessories: ≈ 64 kg (141 LB)

Use On-Site or in Workshop:





ORDER NO.	DESCRIPTION
TU600-1000	Portable facing and boring machine with pneumatic motor – facing Ø: 0 - 600 mm (0” - 23.6”)
TU600E-1020	Portable facing and boring machine with electric motor – facing Ø: 0 - 600 mm (0” - 23.6”)
TU600HY-1060	Portable facing and boring machine with hydraulic motor – facing Ø: 0 - 600 mm (0” - 23.6”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Accurate - Tough - Reliable

TU1100



Ø 0 - 1100 mm (0” - 43.3”)

Description:

The SERCO TU1100 is designed for machining surfaces up to 1,100 mm (43.3”) in diameter. Specially designed support arms increase its capacity.

The rigidity of its design also enables it to machine valve seats down to depths of 500 mm (19.7”). Like the TU400 and 600, it is equipped with automatic feed systems and can be fitted with an RTJ system.

The FC 1150 option, a chain clamping system specially designed for these machines, is also available.

Technical features:

Type	TU1100
Facing Ø	0 – 1100 mm (0“ - 43.3“)
Clamping Ø	280 – 1210 mm (11“- 47.6“)
Axial feed	150 mm (5.9“)
Radial feed	100 mm (3.9“)
Maximum drive motor power (at 6 bars)	570 Watt
Axial downfeed power drive motor	120 Watt
Air supply pressure	5 – 7 (bar) 87 - 101 (psi)
Air-flow required	1500 (l/min) (53 cfm)
Weight	≈ 120 kg (264 lbs.)



Size of TU1100 container N° 1:
- Outside dimensions: 750 x 750 x 550 mm (29.5” x 29.5” x 21.6”)
- Weight: Machine and arm: ≈ 173 kg (381 LB)

Size of TU1100 container N° 2:
- Outside dimensions: 700 x 500 x 530 mm (28” x 20” x 20.8”)
- Weight: Columns and accessories: ≈ 134 kg (295 LB)

Use On-Site or in Workshop:





ORDER NO.	DESCRIPTION
TU1100-1000	Portable facing and boring machine with pneumatic motor – facing Ø: 0 - 1100 mm (0” - 43.3”)
TU1100E-1020	Portable facing and boring machine with electric motor – facing Ø: 0 - 1100 mm (0” - 43.3”)
TU1100HY-1060	Portable facing and boring machine with hydraulic motor – facing Ø: 0 - 1100 mm (0” - 43.3”)

TU series

Portable Facing and Boring Equipment

TU1200

Ø 0 - 1200 mm (0” - 47.2”)



Description:

The SERCO TU1200 is designed for machining surfaces up to 1200 mm (47.2”) in diameter.

It is equipped with the same features as the TU1100, i.e. power, durability and versatility, but with a larger maximum diameter facing capacity.

The SERCO TU1200 can also be equipped with the “RTJ” combined feed system for machining grooves or valve seats up to a depth of 500 mm (19.7”).

With the optional FC 1150 chain clamp, the machine can be attached to a maximum diameter of 1150 mm (45”).

Technical features:

Type	TU1200
Facing Ø	0 – 1200 mm (0” – 74.2“)
Clamping Ø	280 – 1420 mm (11“- 55.9“)
Axial feed	150 mm (5.9“)
Radial feed	100 mm (3.9“)
Maximum drive motor power (at 6 bars)	570 Watt
Axial downfeed power drive motor	120 Watt
Air supply pressure	5 – 7 (bar) 87 - 101 (psi)
Air-flow required	1500 (l/min) (53 cfm)
Weight	≈ 140 kg (308 lbs.)



Size of TU1200 container N° 1:
- Outside dimensions: 750 x 750 x 550 mm (29.5” x 29.5” x 21.6”)
- Weight: Machine and arm: ≈ 196 kg (432.1 LB)

Size of TU1200 container N° 2:
- Outside dimensions: 750 x 500 x 530 mm (29.5” x 20” x 20.8”)
- Weight: Columns and accessories: ≈ 163 kg (359.3 LB)






ORDER NO.	DESCRIPTION
TU1200-1000	Portable facing and boring machine with pneumatic motor – facing Ø: 0 - 1200 mm (0” - 47.2”)
TU1200E-1020	Portable facing and boring machine with electric motor – facing Ø: 0 - 1200 mm (0” - 47.2”)
TU1200HY-1060	Portable facing and boring machine with hydraulic motor – facing Ø: 0 - 1200 mm (0” - 47.2”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Cost Effective

TU1400

Ø 0 - 1400 mm (0” - 55.1”)

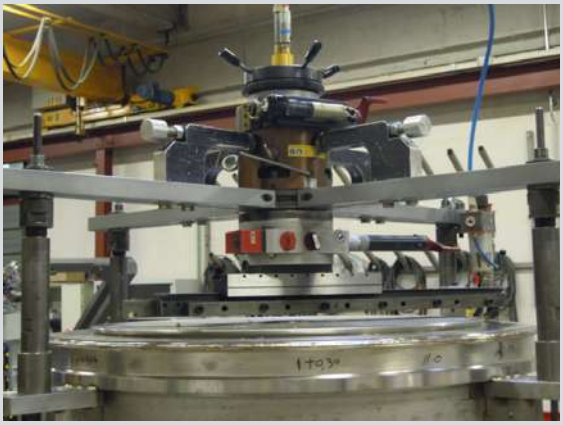

Description:

The SERCO TU1400 is designed for machining surfaces up to 1400 mm (55.1”) in diameter. Especially designed support arms increase its capacity even further.

It is the largest machine within the standard TU range. With its facing and boring capacities to a depth of 500 mm (20”), it is the most versatile machine on the market.

Just like the TU1100 and the TU1200, the SERCO TU1400 can be attached to the outside of the part to be machined using the FC 1150 chain clamping device maximum diameter of 1150 mm (45.3”)

Technical features:

Type	TU1400
Facing Ø	0 – 1400 mm (0“ - 55.1“)
Clamping Ø	280 – 1620 mm (11“- 63.7“)
Axial feed	150 mm (5.9“)
Radial feed	100 mm (3.9“)
Maximum drive motor power (at 6 bars)	570 Watt
Axial downfeed power drive motor	120 Watt
Air supply pressure	5 – 7 (bar) 87 - 101 (psi)
Air-flow required	1500 (l/min) (53 cfm)
Weight	≈ 177 kg (390 lbs.)



Size of TU1400 container N° 1:
- Outside dimensions: 750 x 750 x 550 mm (29.5” x 29.5” x 21.6”)
- Weight: Machine and arm: ≈ 180 kg (396.8 LB)

Size of TU1400 container N° 2:
- Outside dimensions: 700 x 500 x 530 mm (28” x 20” x 20.8”)
- Weight: Columns and accessories: ≈ 134 kg (295.4 LB)

Size of TU1400 container N° 3 (Kit 1400):
- Outside dimensions: 1100 x 700 x 460 mm (43.3” x 27.5” x 18.1”)
- Weight: Columns and accessories: ≈ 199 kg (438.72 lbs)





ORDER NO.	DESCRIPTION
TU1400-1000	Portable facing and boring machine with pneumatic motor – facing Ø: 0 - 1400 mm (0” - 55.1”)
TU1400E-1020	Portable facing and boring machine with electric motor – facing Ø: 0 - 1400 mm (0” - 55.1”)
TU1400HY-1060	Portable facing and boring machine with hydraulic motor – facing Ø: 0 - 1400 mm (0” - 55.1”)

TU-TE Series

Portable Facing and Boring Equipment

TU TE Series

Ø 0mm – 1100 mm (0” – 43.3”)



TU600-TE



Control panel

Description:

Designed on the basis of a standard TU600, the machine is fully automatic and power-driven by brushless motors (rotation, axial and radial feed movements).

Its design enables all mechanical play to be eliminated in order to perform a high level of accuracy. The machine is remote-controlled by an axis interpolation technique in order to carry out highly complex and varied machining operations in addition to normal boring and facing functions:

- Conical machining (infinitely variable angles)
- Fillet (infinitely variable radius
- Threading and tapping (Ø and pitch on request)
- Spiral and concentric serrated surfaces (variable pitch and depth)

The TU600 TE can carry out numerous machining operations, many of which were impossible with a portable machine until now!

Technical features:

Type	TU600-TE
Facing Ø	0 – 600 mm (0“ - 23.6“)
Clamping Ø	290 – 720 mm (9.8‘‘- 28.3“)
Axial feed	135 mm (5.3“)
Radial feed	60 mm (2.4“)
Maximum drive motor power (at 6 bars)	2000 Watt
Axial downfeed power drive motor	200 Watt
Maximum power of axial down-feed motor	100 Watt
Electricity supply	400 V
Weight	≈ 125 kg (275 lbs.)






ORDER NO.	DESCRIPTION
TU400TE-1080	Portable facing and boring machine with brushless electric motor and control system – facing Ø: 0 - 400 mm (0” - 15.7”)
TU600TE-1080	Portable facing and boring machine with brushless electric motor and control system – facing Ø: 0 - 600 mm (0” - 23.6”)
TU1100TE-1080	TU1100-TE Portable facing and boring machine with brushless electric motor and control system – facing Ø: 0 - 1100 mm (0” - 43.3”)


Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

In a nuclear power plant the Main Steam Supply System circuit is protected against extreme pressure by relief valves called MSS valves. These valves are a vital safety element in nuclear power plants and it is essential for them to be in good working order. Seats on these valves have a special geometry and machining them requires suitable precision tooling. MSS tooling is most often used on circuits for 900 MW and 1300 MW reactors. Safety valve design varies slightly from one type of reactor to another, especially as far as valve seats are concerned.

SERCO uses “MSS” tooling specially designed for machining these valve seats. MSS tooling can be fitted to the TU600 and TU1100 as the machines provide all the rigidity required for in-depth machining operations. The complexity and depth of the valve seats to be machined make certain MSS tooling elements vital:

- Extra-short machine clamping arm
- Short columns with adjusting nuts
- Special reinforcement plates
- Feed combination system for an angle of 1°30’
- Feed combination system for an angle of 45°
- Special anti-vibration tool-holder
- Chip protection around the nozzle
- Chip protection inside the nozzle
- Digital ruler for axial feed
- Reinforced drive spindle
- Etc …

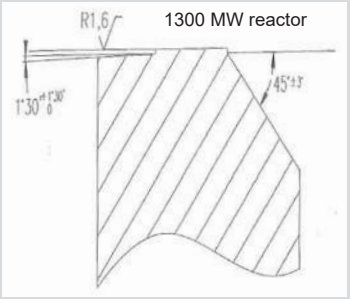

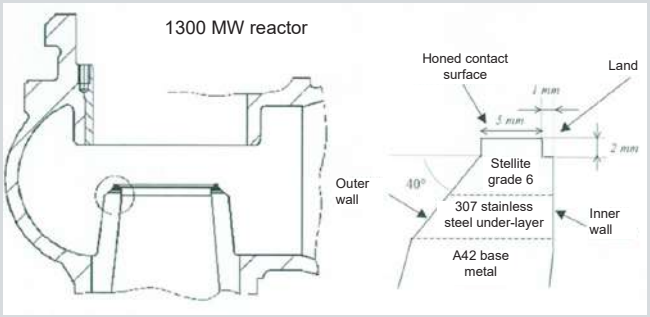

MSS valve seats can also be machined with TU600 TE and TU1100 TE machines. These machines are driven by brushless motors. The machining angles can be modified to suit the different types of valves simply by changing the program. Compared with standard MSS tooling, a significant amount of time is saved.

In fact, intervention times are reduced by 50%.





In certain cases, the machine cannot be attached directly to the part to be machined. Chain systems are available for all the SERCO TU machines, which means that the machine can be attached to the outer rim of the flange and the required machining can be done with the same accuracy as when the machine is attached directly through the bolt holes.

Chain Clamps





FC 300



SERCO TU200 + FC 300



SERCO TU400 + FC 745

RTJ: RTJ seal surfacing system for TU machines

- Conical machining – Machining 2 slopes, inner and outer at an angle of 23° (or any other angle: 30°, 45°, etc.) in relation to the axis of the machine.
- Groove machining



Machining accuracy:
0.01 mm



Serco TU600 with
RTJ system



Conical machining – RTJ
(23°) or any other angle
(30°, 45° etc.)




Machining RTJ groove
sealing surfaces

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Special Machine Design

TU models for diameters larger than those specified in the catalog are available upon request

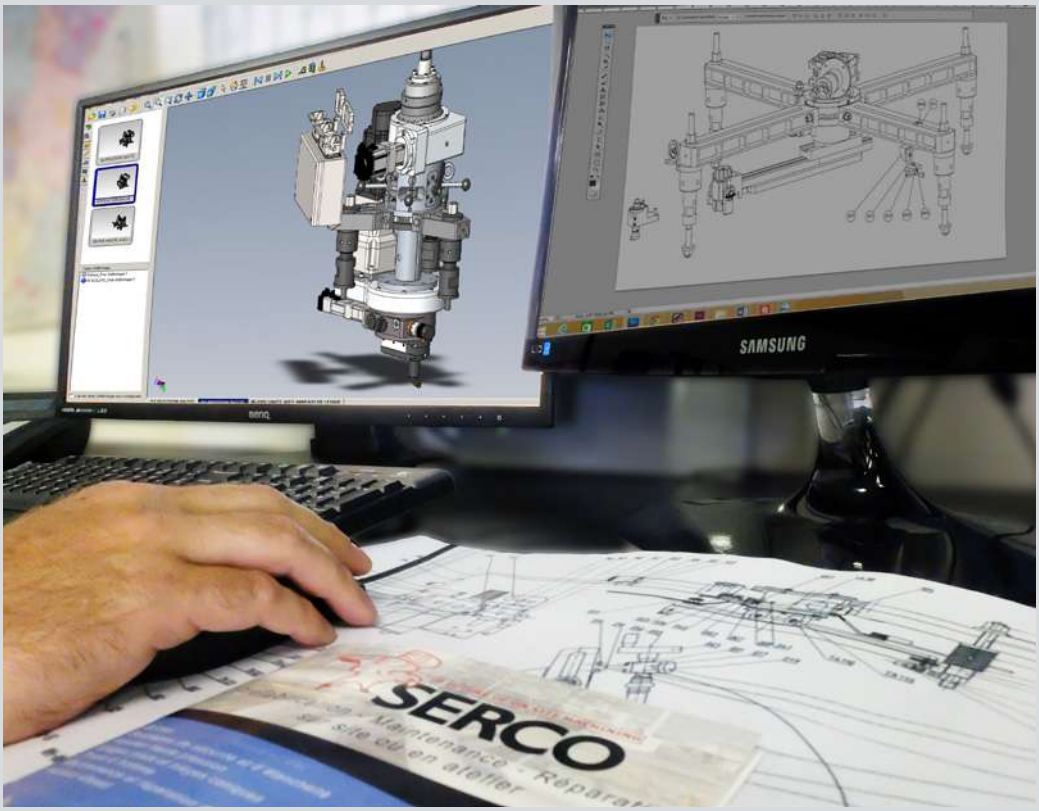

TU Series	Capacities
TU1800	0 - 1800 mm (0 - 70.8”)
TU2000	0 - 2000 mm (0 - 78.7”)
TU2200	0 - 2200 mm (0 - 86.6”)
TU2400	0 - 2400 mm (0 - 94.5”)
TU2800	0 - 2800 mm (0 - 110.2”)
TU3000	0 - 3000 mm (0 - 118.1”)
TU3200	0 - 3200 mm (0 - 125.9”)

SERCO can design and build special machines and accessories to meet the requirements provided in your specifications.

SERCO specializes in making machine tools for machining flanges and valves. SERCO benefits from all the skills and expertise of its research and development department to find solutions to specific needs. Our engineers and technicians possess all the technical expertise needed for meeting the requirements of nuclear power, oil & gas, chemical, petrochemical, defense, shipbuilding, food-processing and other industries.

Responsiveness & Compliance with schedules:

Our teams deal with your requests just as quickly as possible. Your projects are handled with competence and professionalism.

Our technical expertise and know-how enable us to offer you a fast, suitable, rapid and personalized solution.

Consistant Quality in Service and Manufacture:

Serco has designed and built over 1500 special machining and welding machines over the past 50 years for applications in a variety of industries such as:

- Construction
- Prefabrication
- Repair and maintenance

Our operations teams are always ready to make their energy and experience available to our customers throughout the world. “Excellence” marks the quality of our achievements.

SERCO Certifications:

CEFRI Certification N° 484 E

Certification of companies that train and monitor personnel subject to ionizing radiation in the workplace.

CE

Safety systems compliant to EC standards.

Serco TA 240

Portable Boring Machine

TA 240



Ø 0 - 900 mm (0” – 35.4”)

Description:

The SERCO TA 240 machine is a portable boring machine to which four different boring heads can be fitted depending on the range of diameters to be covered:

TA 240 boring machine equipped with a TA 100 head:

- Bores up to Ø 200 mm (7.87”)
- Maximum radial feed 30 mm (1.18”)

TA 240 boring machine equipped with a TA 120 head:

- Bores up to Ø 400 mm (15.7”)
- Maximum radial feed 40 mm (1.57”)

TA 240 boring machine equipped with a TA 170 head:

- Bores up to Ø 600 mm (23.6”)
- Maximum radial feed 60 mm (2.4”)

TA 240 boring machine equipped with a TA 220 head:

- Bores up to Ø 900 mm (35.4”)
- 100 mm(3.9”) maximum radial feed
- Equipped with 4 special positioning columns and a set of four long length arms for clamping on diameters from 350 mm (13.8”) to 1210 mm (47.6”).
- Axial feed = 240 mm

Use On-Site or in Workshop:

Machining liner entablatures on SULZER engines.

Resurfacing six upper bores Ø 505 mm followed by positioning inserts.

Resurfacing six intermediate bores Ø 500 mm followed by positioning six inserts.

Tolerances to be met: 0.03 mm (.001”).

SERCO equipment: TA 240 / 220.



Machining 6 cylinders + positioning inserts in ten days.





Machining grooves.

ORDER NO.	DESCRIPTION
TA240-100-1000	TA 240 borer equipped with the TA 100 head - facing Ø: 0-200 mm (7.87”)
TA240-120-1000	TA 240 borer equipped with the TA 120 head - facing Ø: 0-400 mm (15.7”)
TA240-170-1000	TA 240 borer equipped with the TA 170 head - facing Ø: 0-600 mm (23.6”)
TA240-220-1000	TA 240 borer equipped with the TA 220 head - facing Ø: 0-900 mm (35.4”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual


SERCO XP Series

Portable Equipment for Facing Flanges and Valves

SERCO XP machines are designed very compactly so that they can be used in very confined spaces. Possessing a large radial feed movement, they are ideal for facing operations on flanges and valves. RTJ grooves can be machined using the inclinable head in option.

XP Series	Capacities
XP400NG	10 - 400 mm (0.39” - 15.7”)
XP600NG	10 - 600 mm (0.39” - 23.6”)
XP900NG	10 - 900 mm (0.39” - 35.433”)
XP1200	10 - 1200 mm (0.39” - 47.2”)
XP1800NG	10 - 1800 mm (0.39” - 70.8”)
XP2000NG	10 - 2000 mm (0.39” - 78.74”)
XP2200NG	10 - 2200 mm (0.39” - 86.6”)
XP2400NG	10 - 2400 mm (0.39” - 94.5”)
XP2800NG	10 - 2800 mm (0.39” - 110”)
XP3000NG	10 - 3000 mm (0.39” - 118”)
XP3200NG	10 - 3200 mm (0.39” - 126”)



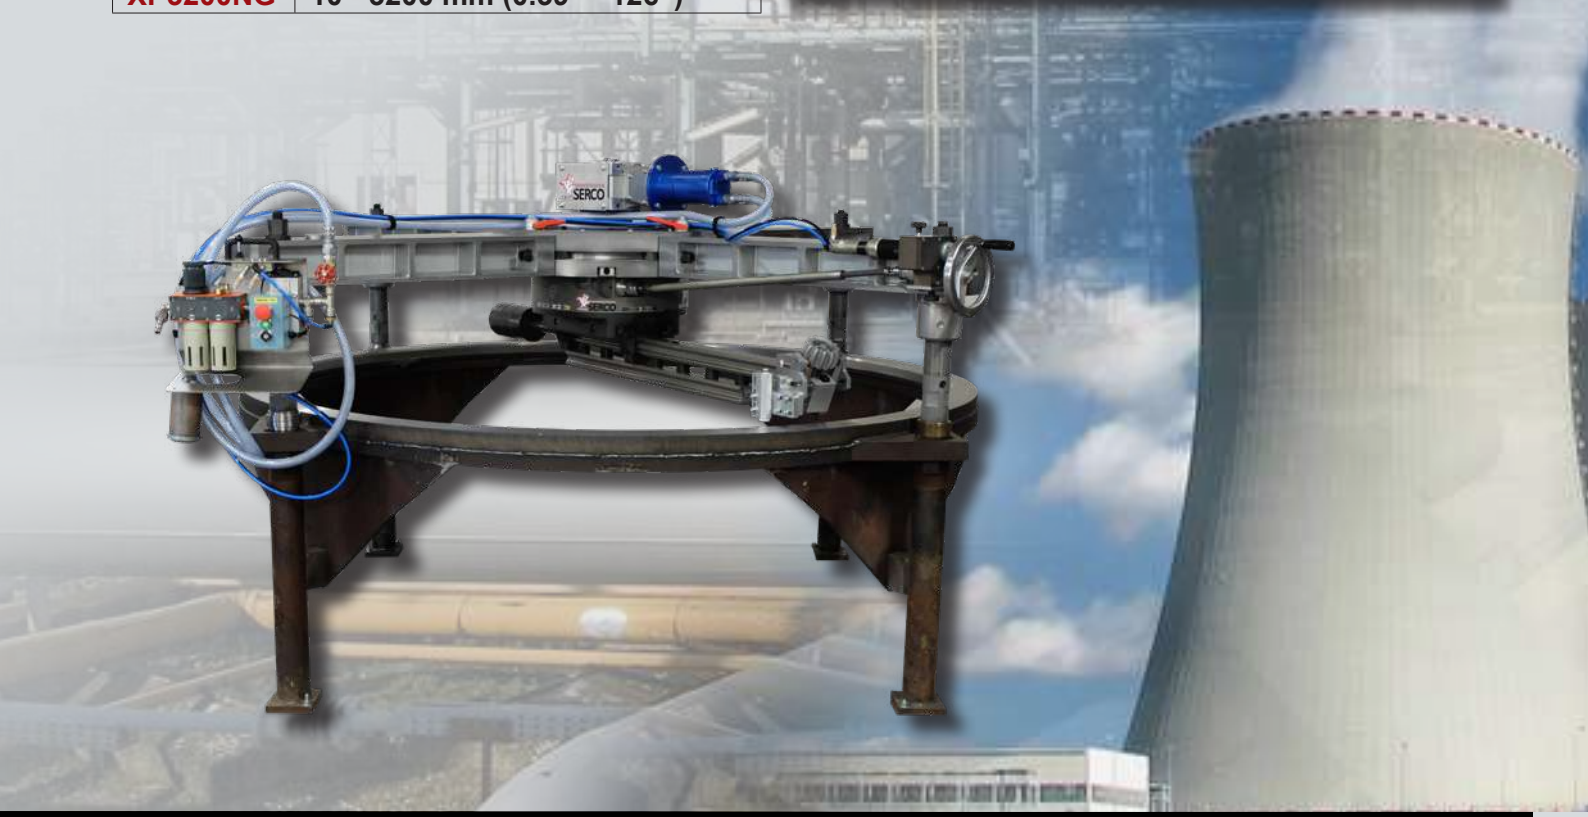

XP Series

Portable Equipment for Facing Flanges and Valves

Rapid Set-up


SERCO XP machines are designed for use in difficult and restrictive conditions. As parallelism and concentricity settings are independent, only two stages are needed to set up the SERCO XP machines. Independent settings mean that the flatness does not need to be adjusted again after the concentricity has been set. Machines can be set-up easily. Once the machine is in position, adjustments can be made effortlessly and achieve high levels of accuracy (0.01 mm).





Precision

With a precision of 0.01 mm and a surface finish quality of Ra 1.6, SERCO machines offer the bestpossible performances for your facing operations.

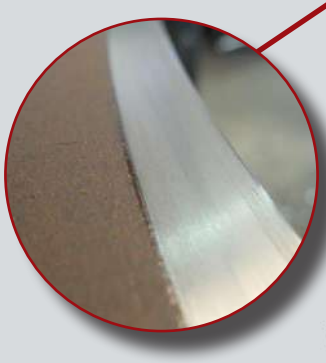

Light and Compact

The SERCO XP is set up easily in even the tightest spaces, and in all positions. Its light weight, compact dimensions and ergonomic design allow for easy installation and use by a single operator.



Clamping

SERCO XP machines are positioned and held in place by a column/arm system that clamps on to the outside of the part to be machined.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual


XP Series

Portable Equipment for Facing Flanges and Valves

XP400NG

Ø 10 - 400 mm (0.393” – 15.7”)



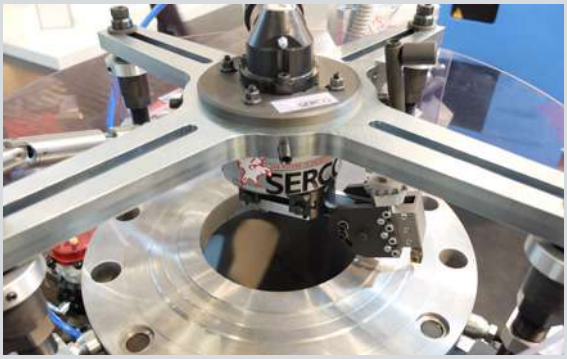

Description:

Surfacing of all types of flanges: 10 to 400 mm (0.393” - 15.7”).

The SERCO XP 400 is the most compact machine in the series.


Its weight is reduced to a strict minimum and enables it to be handled and set up by a single operator, without any need for extra handling devices.


These features make the machine ideal for all surfacing operations on diameters from 10 to 400 mm (15.7”).

Technical features:

Type	XP400NG
Radial movement	30 mm (1.2“)
Radial feed	manual
Minimum facing Ø	10 mm (0.393”)
Maximum facing Ø	400 mm (15.7“)
Minimum clamping Ø	180 mm (7.086“)
Maximum clamping Ø	460 mm (18.11”)
Maximum drive motor power at 6 bars	800 Watt
Drive motor speed under no-load conditions	58 rev/min
Air supply pressure in bars	3.5 bar max (50.76 psi)
Air-flow	1500 l/min (53 cfm)
Weight (approximate)	20 kg (44 lb)
Clamping system	FSTG (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)

Use On-Site or in Workshop:

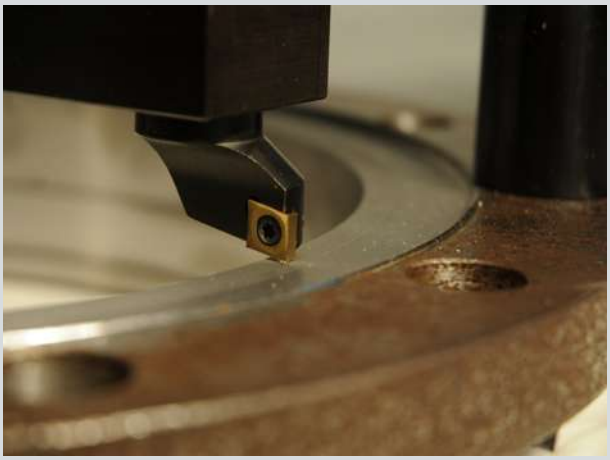

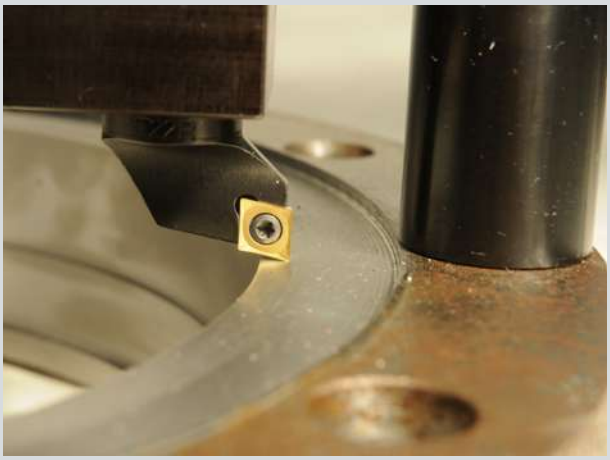


ORDER NO.	DESCRIPTION
XP400NG-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 400 mm (0.393” - 15.7”)
XP400NGE-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 400 mm (0.393” - 15.7”)
XP400NGHY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 400 mm (0.393” - 15.7”)

Xp Series

Portable Equipment for Facing Flanges and Valves

XP600NG

Ø 10 - 600 mm (0.39” – 23.6”)

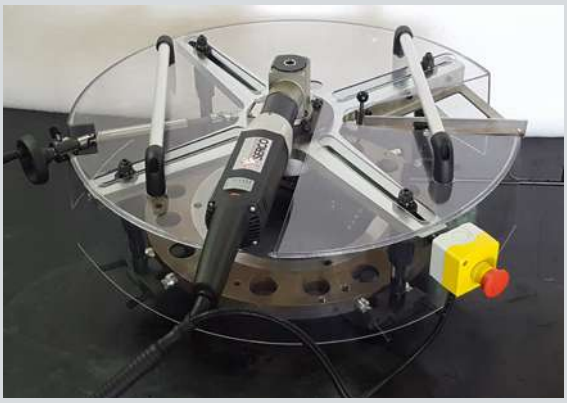



Description:

Surfacing of all types of flanges:
10 to 600 mm (0.393” - 23.6”).

The SERCO XP600NG is the best compromise between machining capacities, light weight and size for a flange facing machine.

Its weight is reduced to a strict minimum and enables to be handled and set up by a single operator, without any need for extra handling devices.

The machine can perform facing operations as well RTJ grooves machining through an inclinable head as an option

This features make the machine ideal for all facing operations on diameters from 10 mm to 600 mm

Technical features:

Type	XP600NG
Radial movement	40 mm (1.6“)
Automatic radial feed (2 speeds)	0.05 & 0.15 mm/rev.
Minimum facing Ø	10 mm (0.39”)
Maximum facing Ø	600 mm (23.6“)
Minimum clamping Ø	200 mm (7.9“)
Maximum clamping Ø	660 mm (26”)
Maximum drive motor power at 6 bars	800 Watt
Drive motor speed under no-load conditions	58 r/min
Air supply pressure in bars	3.5 bar max (50.76 psi)
Air-flow	1500 l/min (53 cfm)
Weight (approximate)	≈25 kg (55 lbs)
Clamping system	FC 745 (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)

Use On-Site or in Workshop:





ORDER NO.	DESCRIPTION
XP600NG-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 600 mm (0.39” - 23.6”)
XP600NGE-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 600 mm (0.39” - 23.6”)
XP600NGHY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 600 mm (0.39” - 23.6”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Dependable Component and Equipment reduce your operating costs

XP900NG

Ø 10 - 900 mm (0.39” – 35.433”)





Description:

Surfacing of all types of flanges: 10 to 900 mm (0.393” - 35.4”).

The SERCO XP900NG is a machine able to reach a 900 mm machining diameter and being set up on site by two operators without any need for extra handling devices.

A powerful motorization allow the SERCO XP900NG to perform flange maintenance in a minimum of time.

The machine can perform facing operations as well RTJ grooves machining through an inclinable head as an option

This features make the machine ideal for all facing operations on diameters from 10 mm to 900 mm

Technical features:

Type	XP900NG
Radial movement	60 mm (2.36“)
Automatic radial feed (2 speeds)	0.05 & 0.15 mm/rev.
Minimum facing Ø	10 mm (0.39”)
Maximum facing Ø	900 mm (35.433“)
Minimum clamping Ø	290 mm (11.41“)
Maximum clamping Ø	990 mm (38.97”)
Maximum drive motor power at 6 bars	1700 Watt
Drive motor speed under no-load conditions	65 r/min
Air supply pressure in bars	5 - 7 bar (72 - 101 psi)
Air-flow	3000 l/min (106 cfm)
Weight (approximate)	≈ 63 kg (138.89 lbs)
Clamping system	FSTG 1150 (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)







ORDER NO.	DESCRIPTION
XP900NG-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 900 mm (0.39” - 35.433”)
XP900NGE-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 900 mm (0.39” - 35.433”)
XP900NGHY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 900 mm (0.39” - 35.433”)

XP Series

Portable Equipment for Facing Flanges and Valves

XP1200

Ø 10 - 1200 mm (0.39” – 47.2”)



Description:

Facing of all types of flanges: 10 to 1200 mm (0.39” - 47.2”)

The SERCO XP 1200 machine uses a machining head that only possesses a radial feed movement. This means that it is more compact than the TU type machines for operations where boring is not required.

4 removable arms adjustable over 360° enable the XP 1200 to be mounted on the dowel pin bores of any type of flange for performing facing operations from 10 to 1200 mm (47.2”).

Technical features:

Type	XP1200
Radial movement	100 mm (4“)
Automatic radial feed (2 speeds)	0.062 & 0.186 mm/rev.
Minimum facing Ø	10 mm (0.39”)
Maximum facing Ø	1200 mm (47.2“)
Minimum clamping Ø	500 mm (20“)
Maximum clamping Ø	1400 mm (55”)
Maximum drive motor power at 6 bars	2000 Watt
Drive motor speed under no-load conditions	45 r/min
Air supply pressure in bars	5 - 7 bar (72 - 101 psi)
Air-flow	3000 l/min (106 cfm)
Weight (approximate)	≈ 240 kg (529 lbs)
Clamping system	FSTG 2050 (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)






ORDER NO.	DESCRIPTION
XP1200-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 1200 mm (0.39” - 47.2”).
XP1200E-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 1200 mm (0.39” - 47.2”).
XP1200HY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 1200 mm (0.39” - 47.2”).

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Solving Industry Challenges through Expertise, Experience and Know-How

XP1800NG

Ø 10 - 1800 mm (0.39” – 70.8”)

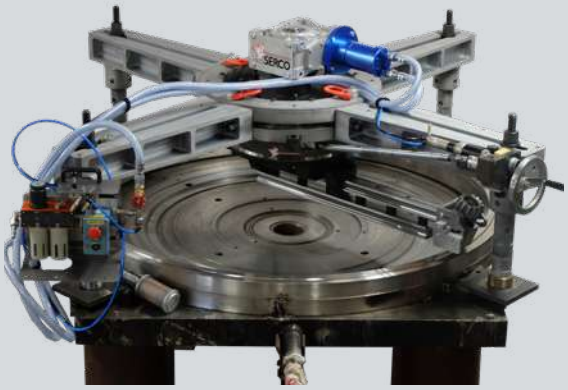


Description:

Surfacing of all types of flanges: 10 to 1800 mm (0.39” to 70.8”)

The SERCO XP1800NG machine is designed on the same principles as the XP1200, with a radial movement machining head. The four mobile clamping arms have been reinforced to maintain the rigidity of the unit when machining diameters up to 1800 mm (70.8”).

Technical features:

Type	XP1800NG
Radial movement	200 mm (8“)
Automatic radial feed	Variable and independent
Minimum facing Ø	10 mm (0.39”)
Maximum facing Ø	1800 mm (70.8“)
Minimum clamping Ø	836 mm (32.9“)
Maximum clamping Ø	2110 mm (83“)
Maximum drive motor power at 6 bars	3000 Watt
Drive motor speed under no-load conditions	21 r/min
Air supply pressure in bars	5 - 7 bar (72 - 101 psi)
Air-flow	4000 l/min (141 cfm)
Weight (approximate)	≈ 770 kg (≈ 1697.5 lbs)
Clamping system	FSTG 2050 (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)

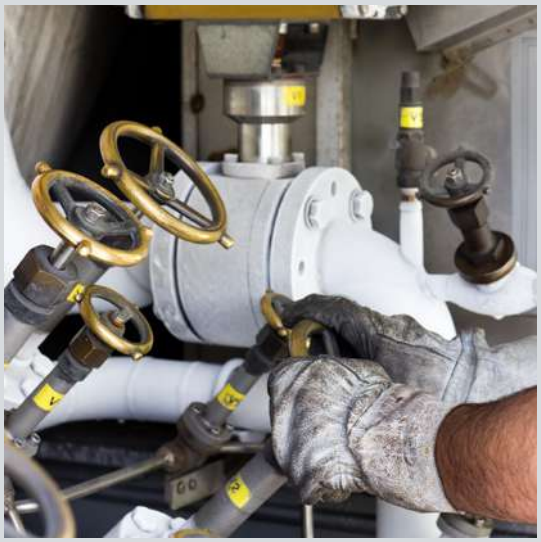



ORDER NO.	DESCRIPTION
XP1800NG-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 1800 mm (0.39” - 70.8”)
XP1800NGE-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 1800 mm (0.39” - 70.8”)
XP1800NGHY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 1800 mm (0.39” - 70.8”)

■ XP Series

Portable Equipment for Facing Flanges and Valves

XP2000NG

Ø 10 - 2000 mm (0.39” - 78.74”)



Description:

Surfacing of all types of flanges from 10 to 2000 mm (0.39” to 78.74”).

Just like the XP 1200 and XP1800NG models, the SERCO XP 2000 is equipped with a radial-feed machining head and four removable clamping arms the position of which can be adjusted depending on the application. SERCO engineers have paid particular attention to maintaining the rigidity of the assembly in order to guarantee high precision machining on surfaces up to 2000 mm (78.74”) in diameter.

Technical features:

Type	XP2000NG
Radial movement	200 mm (8“)
Automatic radial feed	Variable and independent
Minimum facing Ø	10 mm (0.39”)
Maximum facing Ø	2000 mm (78.74“)
Minimum clamping Ø	836 mm (32.9“)
Maximum clamping Ø	2310 mm (91“)
Maximum drive motor power at 6 bars	3100 Watt
Drive motor speed under no-load conditions	21 r/min
Air supply pressure in bars	5 - 7 bar (72 - 101 psi)
Air-flow	4000 l/min (141 cfm)
Weight (approximate)	≈ 780 kg (1720 lbs)
Clamping system	FSTG 2500 (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)





ORDER NO.	DESCRIPTION
XP2000NG-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 2000 mm (0.39” - 78.74”)
XP2000NGE-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 2000 mm (0.39” - 78.74”)
XP2000NGHY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 2000 mm (0.39” - 78.74”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

For over 50 years at the frontline of the Nuclear Industry

XP2200NG

Ø 10 - 2200 mm (0.39” - 86.6”)



Description:

Surfacing of all types of flanges: 10 to 2200 mm (0.39” to 86.6”).

Using the same machining head as the smaller versions, the SERCO XP 2200 has been designed for machining even larger diameters. To do this, an intermediate ring has been added to prevent any inadvertent movement on the flange facing attachment. In this way, the arm is guided perfectly, which enables the XP 2200 to guarantee accuracies similar to those obtained with other equipment in the SERCO range, and this up to diameters of 2200 mm (86.6”).

Technical features:

Type	XP2200NG
Radial movement	200 mm (8“)
Automatic radial feed	Variable and independent
Minimum facing Ø	10 mm (0.39”)
Maximum facing Ø	2200 mm (86.6“)
Minimum clamping Ø	836 mm (32.9“)
Maximum clamping Ø	2570 mm (101“)
Maximum drive motor power at 6 bars	3100 Watt
Drive motor speed under no-load conditions	21 r/min
Air supply pressure in bars	5 - 7 bar (72 - 101 psi)
Air-flow	4000 l/min (141 cfm)
Weight (approximate)	≈ 820 kg (≈ 1808 lbs)
Clamping system	FSTG 2500 (option)
Tiltable head (bores, RTJ grooves, conical machining)	YES (option not included in the scope of delivery)

Use On-Site or in Workshop:






ORDER NO.	DESCRIPTION
XP2200NG-1000	Portable flange facing machine with pneumatic motor – facing Ø: 10 - 2200 mm (0.39” - 86.6”)
XP2200NGE-1020	Portable flange facing machine with electric motor – facing Ø: 10 - 2200 mm (0.39” - 86.6”)
XP2200NGHY-1060	Portable flange facing machine with hydraulic motor – facing Ø: 10 - 2200 mm (0.39” - 86.6”)



FSTG

The “FSTG” system enables the SERCO XP400NG/ 600NG/900NG/1200/1800NG/2000NG/2200NG machines to be held onto the outside surface of a flange in order to re-machine sealing surfaces and bolt working surfaces.

The SERCO FSTG system does not distort the part in any way, either on the flange when it is being set up or on the seal surface after being removed.

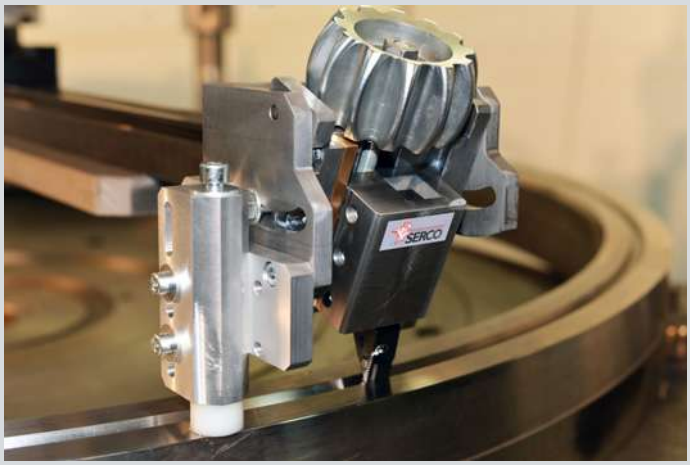

Tiltable Head

The tiltable head is designed for boring, for machining RTJ grooves and for conical machining. It is attached to the end of the facing arm. The results obtained are just as precise as with the standard facing tool.






Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Designing Special Machines

XP models for diameters larger than those listed in the catalog are available upon request

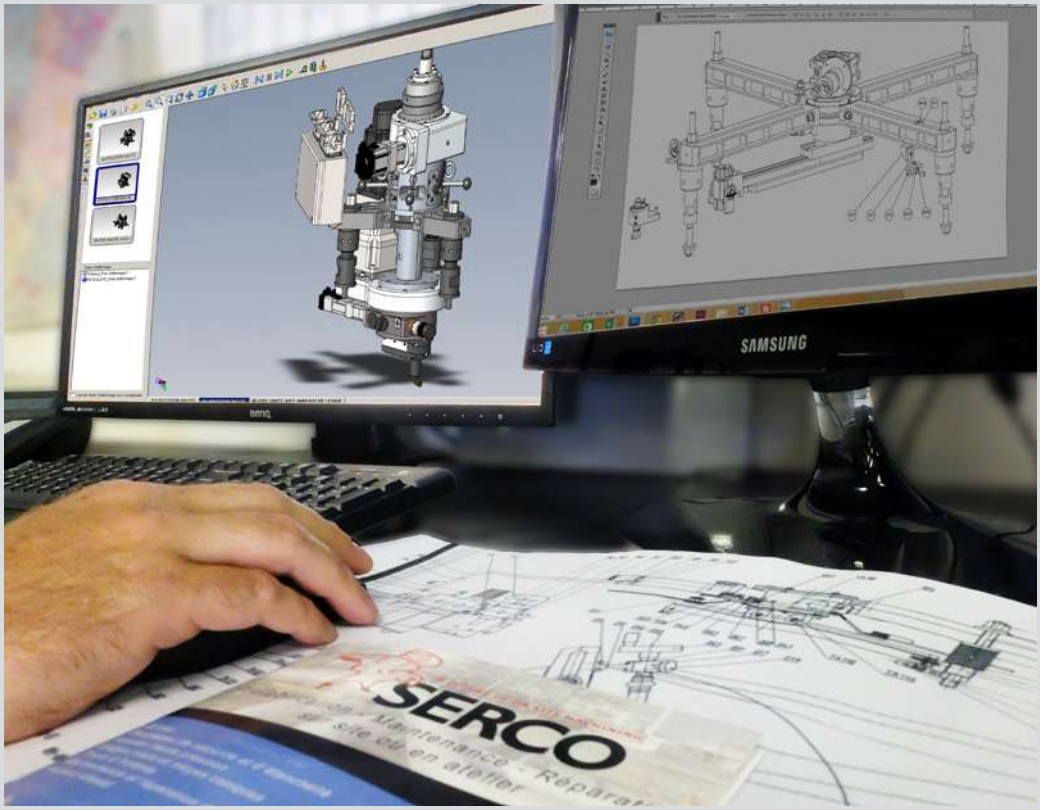

XP Series	Capacities
XP2400NG	10 - 2400 mm (0.39” - 94.5”)
XP2800NG	10 - 2800 mm (0.39” - 110”)
XP3000NG	10 - 3000 mm (0.39” - 118”)
XP3200NG	10 - 3200 mm (0.39” - 126”)

SERCO can design special machines and devices meeting the requirements given in your specifications.

SERCO specializes in making machine tools for machining flanges and valves. SERCO benefits from all the skills and expertise of its research and development department to find solutions to specific needs. Our engineers and technicians possess all the technical expertise needed for meeting the requirements of nuclear power, oil & gas, chemical, petrochemical, defense, shipbuilding, food-processing and other industries.

Responsiveness & Compliance with schedules:

Our teams deal with your requests just as quickly as possible. Your projects are handled with competence and professionalism.

Our technical expertise and know-how enable us to offer you a fast, suitable, rapid and personalized solution.

Consistant Quality in Service and Manufacture:

Serco has designed and built over 1500 special machining and welding machines over the past 50 years for applications in a variety of industries such as:

- Construction
- Prefabrication
- Repair and maintenance

Our operations teams are always ready to make their energy and experience available to our customers throughout the world. “Excellence” marks the quality of our achievements.

SERCO Certifications:

CEFRI Certification N° 484 E

Certification of companies that train and monitor personnel subject to ionizing radiation in the workplace.

CE


Safety systems compliant to EC standards.

MS Series

Portable Equipment for Facing Flanges and Valves

MS 600

Ø 0 - 600 mm (0” – 23.6”)

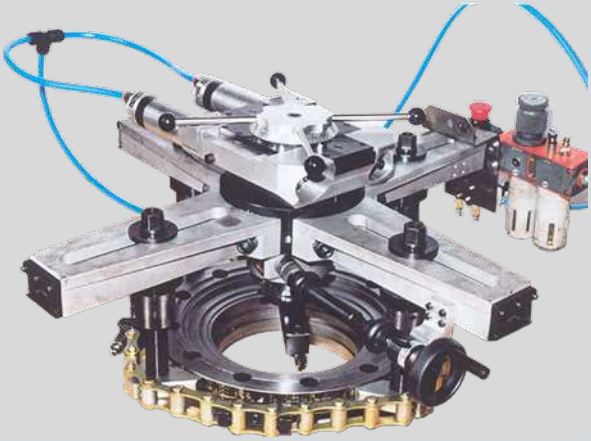


Description:

The drive system on the MS machines is more powerful than on the XP machines, which enables them to carry out core-drilling operations. The high torque of the motor is adapted to machining seriously damaged surfaces or where deeper cutting passes are required. Among other things, the MS 600 machine is equipped with an axial feed system for machining the bottoms of grooves on flanges and valves in confined areas.

ORDER NO.	DESCRIPTION
MS600-1000	Portable flange facing machine with outside clamping – facing Ø: 0 - 600 mm (0” - 23.6”).

Technical features:

Type	MS 600
Radial feed movement	40 mm (1.6“)
Automatic radial feed (2-speed)	0.05 & 0.15 mm/ rev.
Axial feed movement	32 mm (1.25”)
Axial feed	Manual
Minimum facing Ø	0 mm
Maximum facing Ø	600 mm (23.6“)
Minimum clamping Ø	240 mm (11“)
Maximum clamping Ø	680 mm (26.7”)
Maximum motor output power at 6 bars	2*740 Watt
Air supply pressure	5 - 7 bar (72 - 101 psi)
Air flow	2000 l/min (70.6 cfm)
Weight (approximate)	68 kg (150 lbs)
Clamping system	YES (option not included in the scope of delivery)

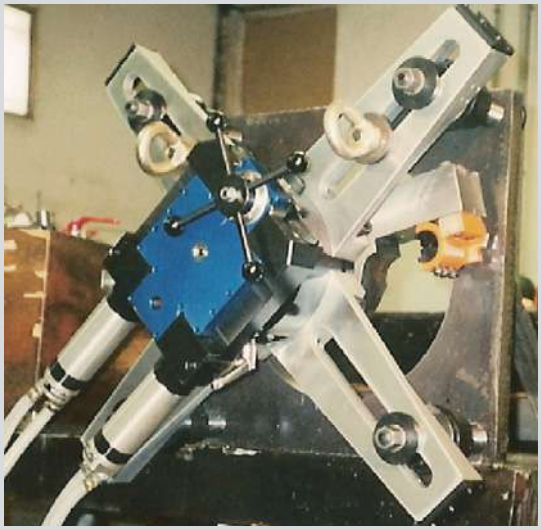



Lightweight and compact

SERCO MS series machines can be set up easily in confined spaces and in all positions. Due to its light weight, the machine can be easily used by a single operator.

Dual drive system

Thanks to its dual drive system, the SERCO MS series machine can machine materials such as Duplex, Super Duplex, P91, etc.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

MS Series

Portable Equipment for Facing Flanges and Valves

MS 2300

Ø 1000 - 2300 mm (39.3” – 90.5”)



ORDER NO.	DESCRIPTION
MS2300-1000	Portable flange facing machine – surfacing Ø: 1000-2300 mm (39.4” - 90.551”).

Description:

The MS 2300 machine is positioned and held in place by a column/arm system clamped on the outside of the part to be machined. The outside clamping principle enables a wide range of machining processes and, as such, small diameters can be machined.

MS machines can be configured rapidly and easily. Their design enables concentricity to be set independently from parallelism for reaching an accuracy of 0.01 mm with a surface finish of Ra 1.6.

Technical features:

Type	MS 2300
Radial feed movement	100 mm (4“)
Automatic radial feed (2-speed)	0.062 & 0.186 mm/rev.
Axial feed movement	50 mm (2”)
Axial feed	0.08 mm/rev.
Minimum facing Ø	1000 mm (40”)
Maximum facing Ø	2300 mm (90“)
Minimum clamping Ø	1250 mm (50“)
Maximum clamping Ø	2500 mm (98”)
Maximum motor output power at 6 bars	4*900 Watt
Air supply pressure	5 - 7 bar 72 - 101 psi
Air flow	5000 l/min (176 cfm)
Weight (approximate)	1600 kg (3527 lbs)
Clamping system	No


Applications:





Grooves machining



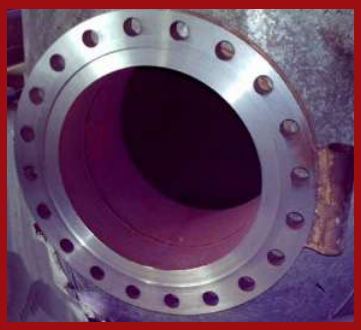

Raised face flange machining



Drilling of a 50mm wall thickness metal sheet

Facing Machines

Inside Clamping

Flange Facing Attachment

Single-Point Machining



Description:

Flange sealing surfaces can be machined with the flange facing attachments, while preserving the integrity of the machined part at the same time.

Operations can be carried out on site or in the fabrication workshop.

Reliability, very high accuracy, sturdiness, lightness, ease of set-up, operator safety.


Adjustable surface finish from the roughest (Ra 6.3) to the smoothest (Ra 0.8).

Clamping is carried out directly on the inside surface of the flange using the PROTEM US machine clamping mandrel. For certain configurations, extra sets of jaws are used, or even a special clamping mandrel to ensure that the machine is perfectly positioned on the flange in terms of perpendicularity and concentricity.

Different materials can be machined: Carbon steel, stainless steel, different alloys, aluminum, duplex, super duplex, austenite, inconel, P91, etc.



Technical features:

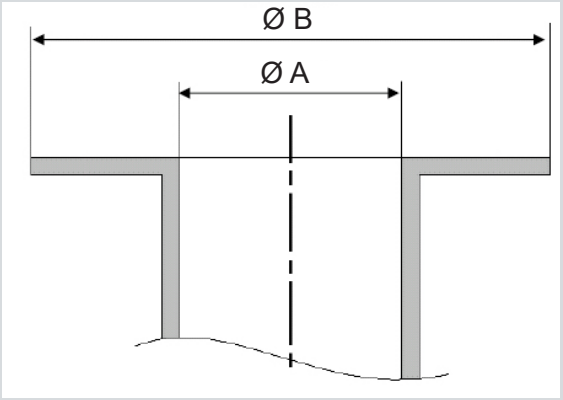

ORDER NO.	US25-ACC	US30CH-ACC	US40-ASB
Clamping capacity Inside Ø	Ø 25 – 107 mm 0.984” – 4.213”	Ø 32 – 114.3 mm 1.260” – 4.500”	Ø 42 - 222 mm 1.654” – 8.740”
Machining capacity ØA	Ø 40 mm 1.575”	Ø 45 mm 1.772”	Ø 59 mm 2.323”
Machining capacity ØB	Ø 276 mm 10.866”	Ø 323 mm 12.717”	Ø 414 mm 16.299”
Weight	5 kg 11 lbs	9 kg 19.8 lbs	13 kg 28.7 lbs



ORDER NO.	US80-ASB	US150-ASB	US450-ASB
Clamping capacity Inside Ø	Ø 80 - 355 mm 3.150” – 13.976”	Ø 150 – 508 mm 5.906” 20.000”	Ø 420 – 1828.8 mm 16.535” -72.000”
Machining capacity ØA	Ø 95 mm 3.740”	Ø 167 mm 6.575”	Ø 450 mm 17.717”
Machining capacity ØB	Ø 627 mm 24.685”	Ø 917 mm 36.102”	Ø 1828.8 mm 72.000”
Weight	30 kg (66.1 lbs)	45 kg (99.2 lbs)	65 kg (143.3 lbs)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

SBM1 Portable Boring Bar

Portable Boring Machine

SBM 1

Ø 38 - 150 mm (1.49” – 5.9”)









Description:

The SERCO boring bar is equipped with two identical centering cones to fit it perfectly in the bore.The machine can be set up easily and rapidly.

The SERCO SBM 1 boring bar can be precisely adjusted in concentricity and parallelism to an accuracy of 0.01 mm.

Compact and light-weight, the SERCO boring bar is the perfect tool for all your on-site machining operations.

Its technology enables facing operations to be carried out over a few millimeters and boring up to 285 mm (11.2”).

The quality of SERCO production and the compactness of the unit make it one of the best-performing machines on the market.

The SBM 1 can be electrically, pneumatically or hydraulically powered (other drives are availabe upon request).

Technical features:


Type	SBM1
Axial movement	285 mm (11.2”)
Automatic axial movement	0 - 85 r/min
Minimum machining Ø	38 mm
Maximum machining Ø	150 mm
Rotation speed	50 - 120 r/m
Minimum length of machine	100 mm
Maximum length of machine	1950 mm
Maximum electric motor power (230 V)	1050 Watt

ORDER NO.	DESCRIPTION
SBM1-1000	Borer SBM 1



Milling Unit - BDF 1100

BDF 1100

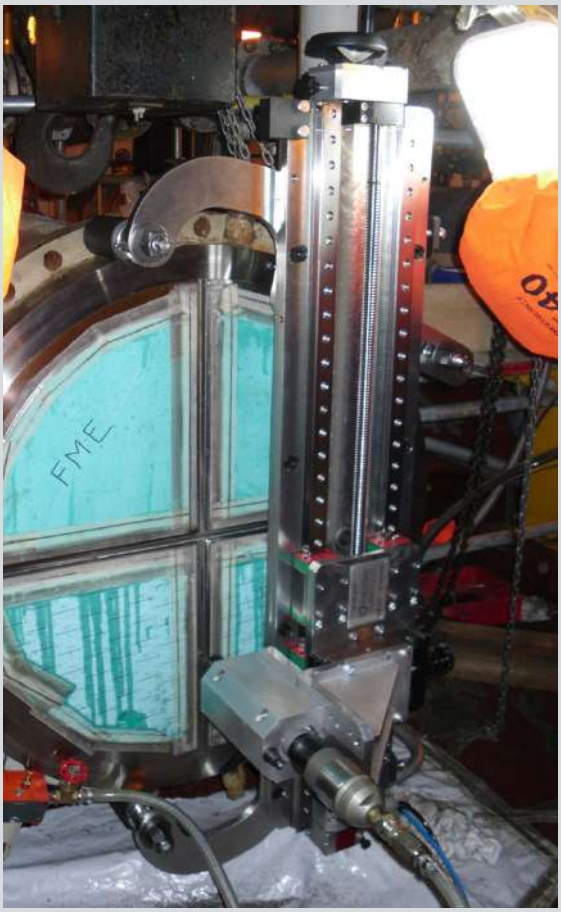


Description:

The SERCO milling unit is designed for carrying out numerous milling operations (surfacing, slot-milling, beveling, drilling, tapping, cutting with a milling saw, etc. On flanges or sheeting, on site or in the workshop.

It can be used flat or on a vertical axis as required. Its clamping and adjustable foot system provides it with a machining capacity of up to 1025 mm (40.35”).

Its ease of use, rigidity, flexibility of adjustment and high machining capacity make it a highly versatile tool.

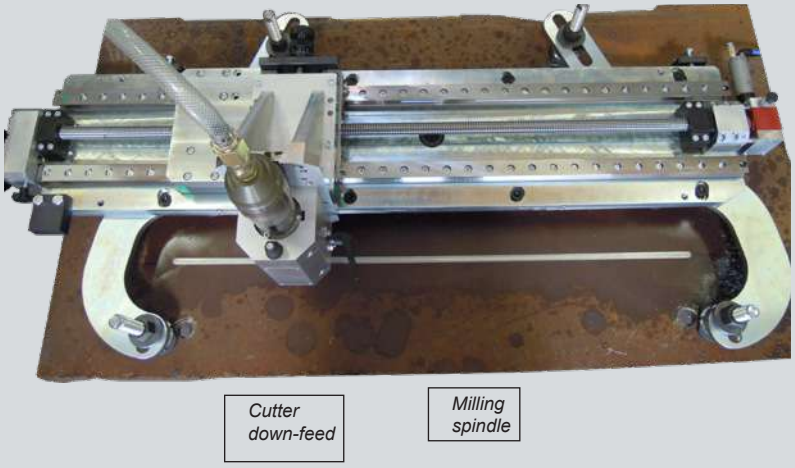





Technical features:

Pneumatically driven longitudinal and spindle feeds: pressure 6 bar / flow 2160l per min

Cross-feed and down-feed: manual

Power-driven longitudinal feed (P=120 W): movement 1025 mm, reversible and declutchable by pre-loaded ball-screw and nut

Manual rapid longitudinal feed: Gearbox with handle and multiplier gear (ratio 3)

Longitudinal guiding: Pre-loaded roller bearings mounted on rails

Cross-traverse carriage: movement 50 mm (1.968”), dovetail guiding, precision vernier scale and lock screw

Cutter down-feed: movement 100 mm (3.934”), with vernier scale and locking handle

Milling spindle: Mounted on a support bracket (3 possible positions) power 1500 W, movement 100 mm (3.934”), with SA 30 taper adapter, cutter spindle with ER collet (up to diameter of 20 mm (0.787”).

FRL pneumatic unit with emergency stop and drive control.

Weight and dimensions:

- Machine dimensions: 1510 x 700 x 490 mm
- Machine weight: 193 kg

Possible options:

Inclusion of a right-angle attachment on the spindle for sawing and saw-milling

Power-driven radial movement is possible




Milling units with different lengths of movement can be designed.

ORDER NO.	DESCRIPTION
BDF1100-1000	Grooving and milling bench for Ø 0 mm - 1025 mm (0” - 40.354”)
BDF2100-1000	Grooving and milling bench for Ø 0 mm - 2100 mm (0” - 82.677”)

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

■ Options


Ultimate Technology

	Options	May be combined with the machines:
	**Chain clamping: FC 300**	TU200 TU400
	**Chain clamping: FC 745**	TU400 TU600
	**Chain clamping: FC 1150**	TU1100
	**Grinding device: UR 40**	TU400 TU600 TU1100 TU1200 TA 240
	**AC 38 conical machining system**	TU600 TU1100 TU1200 TA 240
	**System for making RTJ groove bearing surfaces**	TU400 TU600 TU1100 TU1200
	**FSTG system for clamping the unit onto the dowel pin bores**	XP1200 XP1800NG XP2000NG XP2200NG
	**Tiltable head**	XP1200 XP1800NG XP2000NG XP2200NG

Options

FC 300

Chain Clamping

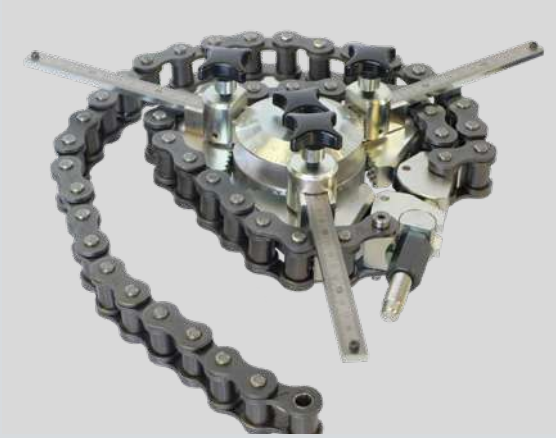

Description:

SERCO machining units can be attached to the outside surfaces of parts (flanges, valves, etc) with the FC 300. This means that bolt working surfaces and bearing surfaces (or other surfaces) can be completely machined.

Thanks to its simple functional design, the unit can be set up in any position in a few minutes by a single operator.

For use with TU200 and TU400 machines

Technical features:

ORDER NO.	DESCRIPTION
FC300-1000	Chain Clamping Device

Type	FC 300
Clamping diameter	85 – 300 mm (3.3”- 11.8”)
Minimum thickness of flange for attaching jaws	16 mm (0.63”)
The chain tensioner can be positioned on any link.	
Angular position of jaws identified for displaying the angles directly on the SERCO machine clamping arms.	

FC 300 supplied with
3 hardened steel jaws
1 graduated angle disk
3 graduated steel rules with cursor
1 cadmium-plated chain with screwed left, length: 1200 mm (47.2”)
1 main chain tensioner
6 aluminum Jaw inserts + 6 stainless steel jaw inserts
6 secondary tensioners
1 set of wrenches

FC 745

Chain Clamping



Description:

SERCO machining units can be attached to the outside surfaces of parts (flanges valves, etc.) with the FC 745 Chain Clamping device. This means that sealing and dowel pin bearing surfaces can be completely machined.

Thanks to its simple functional design, the chain can be set up by a single operator, in any position, in just a few minutes.

For use with TU400 and TU600 machines.

Technical features:

ORDER NO.	DESCRIPTION
FC745-1000	Chain Clamping Device

Type	FC 745
Clamping diameter:	160 – 745 mm (6.2” - 29.3”)
Minimum thickness of flange for attaching the jaws	20 mm (0.79”)
The chain tensioner can be positioned on any link.	
Angular position of jaws identified for displaying the angles directly on the SERCO machine clamping arms.	

FC 745 supplied with
3 hardened steel jaws
1 graduated angle disk
3 graduated steel rules with cursor
1 cadmium-plated chain with screwed left, length: 2500 mm (98.4”)
1 main chain tensioner
6 aluminum Jaw inserts + 6 stainless steel jaw inserts
6 secondary tensioners
1 set of wrenches

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Your trusted partner for integrity assessment

FC 1150 — Chain Clamping Device



ORDER NO.	DESCRIPTION
FC1150-1000	Chain Clamping Device

Description:

SERCO machining units can be attached to the outside surfaces of parts (flanges valves, etc.) with the FC 1150 chain clamping device. This means that sealing and dowel pin bearing surfaces can be entirely machined.

Thanks to its simple functional design, the chain can be set up by a single operator, in any position, in just a few minutes.

The FC 1150 chain clamping device is designed for attaching the SERCO TU1100 machining unit to the outside rim of the part to be machined.

Technical features:

Type	FC 1150
Clamping Diameter:	430 – 1150 mm (16.9" - 45.3")
Minimum thickness of flange for attaching the jaws	30 mm (1.18")
The chain tensioner can be positioned on any link.	
Angular position of the jaws to display the angles directly on the SERCO machine clamping arms.	

FC 1150 supplied with
4 hardened steel jaws
1 graduated angle disk
4 graduated steel rules with cursor
1 cadmium-plated chain with screwed left, length: 4000 mm (157.48")
1 main chain tensioner
8 aluminum Jaw inserts + 8 stainless steel jaw inserts
8 secondary tensioners
1 set of wrenches

UR 40 — Grinding attachment (for SERCO TU and TA)



ORDER NO.	DESCRIPTION
UR40-1000	Grinding attachment – Use with a TU400/600 or TA 240/120 and TA 240/170 machining unit
UR45-1000	Grinding attachment – Use with a TU 1100 or TA 240/220 machining unit

Description:

UR 40 Principles of Operation:

Elimination of defects in the bearing surface made by traditional machining. Bearing surfaces ground without any need for dismantling and resetting the machine.

Applications:

- Grinding – Ø max (of the bearing surface to be ground): 200 mm (7.87") (+ TU400)
- Grinding – max depth (of the bearing surface to be ground): 180 mm (7.09") (+ TU400)
- Rotation speed (under no-load condition): 30000 RPM
- Power: 220 W
- Weight: 0.9 kg (1.984 LB)
- Air consumption: 340 l per min.

UR40 supplied with:

- 1 turbine
- 1 turbine extension
- 2 sets of 3 boron nitride carbide wheels
- 1 set of wrenches
- 1 operating manual

Options

SERCO AC 38



ORDER NO.	DESCRIPTION
TU600-AC38-1000	Attachment for conical machining with the TU600 – facing Ø: 150-580 mm (5.905" - 22.8").
TU1100-AC38-1000	Attachment for conical machining with the TU1100 – facing Ø: 200-1000 mm (7.9" - 39.4")



Attachment for Conical Machining

Description:

Designed for working at all angles from 0° to 180°. Standard tools may be used without any NC requirements. The attachment can be mounted on all types of SERCO TU600, TU1100, TU1200 and TA 240 portable machining units by means of an adaptor specifically designed for each type of machine.

Technical features:

Machining diameter:

AC38 + TU600 / TA 240/170: 150 – 580 mm (5.9" - 22.8")

AC38 + TU1100 / TA 240/220: 200 – 1000 mm (7.9" - 39.4")

Equipment required for using the AC 38 attachment on SERCO machines

- Rack support
- Rack extension
- Handle extension
- Column extension

Adaptation on SERCO – TU600 – TU1100 – TU1200 & TA 240 / TA 120-170-220:

- Modification of facing bit holders depending on the type of machine used.
- Modification to the machining head for fitting the SERCO AC 38 attachment.



Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

RTJ

System for TU machines



Description:

Making RTJ groove bearing surfaces:

- Conical machining – Machining 2 slopes, inside and outside at an angle of 23° to vertical.
- Groove machining

Conical machining for RTJ groove bearing surfaces is done using an automatic feed combining the radial and axial feeds on the SERCO portable machine.

Angular accuracy / Machining accuracy: 0.01 mm / Surface finish: Ra 1.6.

Technical features:

ORDER NO.	DESCRIPTION
TU400RTJ-1000	Attachment for machining 23° slopes (ring type joint bearing surface)
TU600RTJ-1000	Attachment for machining 23° slopes (ring type joint bearing surface)
TU1100RTJ-1000	Attachment for machining 23° slopes (ring type joint bearing surface)

The SERCO RTJ machine equipped in this way is designed for:

- Horizontal machining – facing
- Vertical machining – boring
- Conical machining – RTJ (23°) or any other angle (30°, 45°, etc.)

RTJ technical principles:




- Angular gearbox: Driven by the rapid return system on the boring head.
- Universal joint: For transmitting the rotation movement in a vertical plane.
- Gear/wheel assembly: Drives the gear via the universal joint. The wheel is positioned on the machine vernier scale support.
- Clutch system: For engaging the gear on the wheel for generating the down-feed movement at the angle defined beforehand.
- Down-feed as per the predefined angle.





Options

FSTG

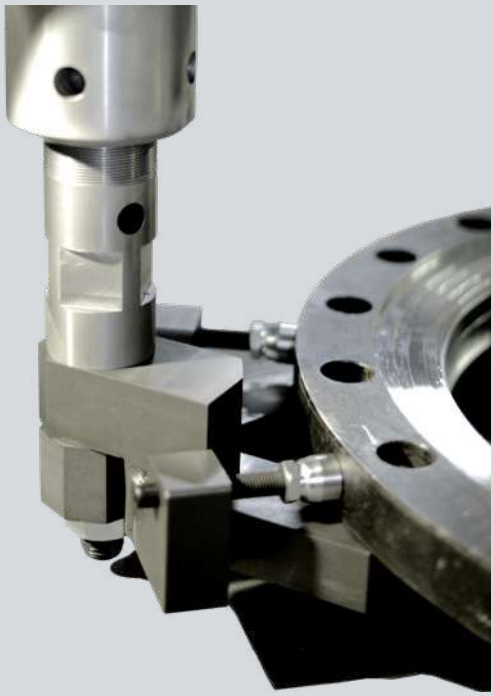

System for clamping

Description:

The “FSTG” system for clamping the unit onto the bolt working surface enables the SERCO XP400NG/600NG/900NG/1200/1800NG/2000NG/2200NG machines to be held onto the outside surface of a flange in order to re-machine sealing surfaces and bolt working surfaces.

The SERCO FSTG system does not distort the part in any way, either on the flange when it is being set up or on the seal surface after being removed.

ORDER NO.	DESCRIPTION
FSTG500-1000	System for clamping the Unit onto the dowel pin bores for SERCO XP400NG and XP600NG or SERCO TU400
FSTG1000-1000	System for clamping the Unit onto the dowel pin bores for SERCO XP900NG or SERCO TU1200, TU1400
FSTG2050-1000	System for clamping the Unit onto the dowel pin bores for XP1200 and XP1800NG
FSTG2500-1000	System for clamping the Unit onto the dowel pin bores for XP2000NG and XP2200NG
FSTG3300-1000	System for clamping the Unit onto the dowel pin bores for XP3200NG

Tiltable Head





Description:

The tiltable head is designed for boring, for machining RTJ grooves and for conical machining. It is attached to the end of the facing arm. The results obtained are just as precise as with the standard facing tools.

May be combined with the machines:

- XP400NG
- XP600NG
- XP900NG
- XP1200
- XP1800NG
- XP2000NG
- XP2200NG

ORDER NO.	DESCRIPTION
XP400NG-IH-KIT	Set “Inclinable Head with Clutch” for SERCO XP400NG
XP400NG-IH-1700	Inclinable Head for SERCO XP400NG and XP600NG (clutch not included)
XP400NG-C-IH-1800	Clutch used with inclinable head for SERCO XP400NG (inclinable head not included)
XP600NG-IH-KIT	Set “Inclinable Head with Clutch” for SERCO XP600NG
XP600NG-C-IH-1800	Clutch used with inclinable head for SERCO XP600NG (inclinable head not included)
XP900NG-IH-KIT	Set “Inclinable Head with Clutch” for SERCO XP900NG
XP900NG-IH-1700	Inclinable Head for SERCO XP900NG (clutch not included)
XP900NG-C-IH-1800	Clutch used with inclinable head for SERCO XP900NG (inclinable head not included)
XP-IH	XP-IH Set “Inclinable head with Clutch” for SERCO XP1200 / 1800NG / 2000NG / 2200NG

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

SERCO: Equipment Designed for your On-Site Operations!

SERCO machines represent the right solution for a wide range of applications.




Nuclear Power Industry:

- Resurfacing joint surfaces in water boxes.
- Machining sealing surfaces.
- Boring tank cover lifting eyes on Lemoniz tanks.

Renewable Energy:

- Machining flanges for connecting wind-turbine foot and mast elements (ferrules) and on mast heads.



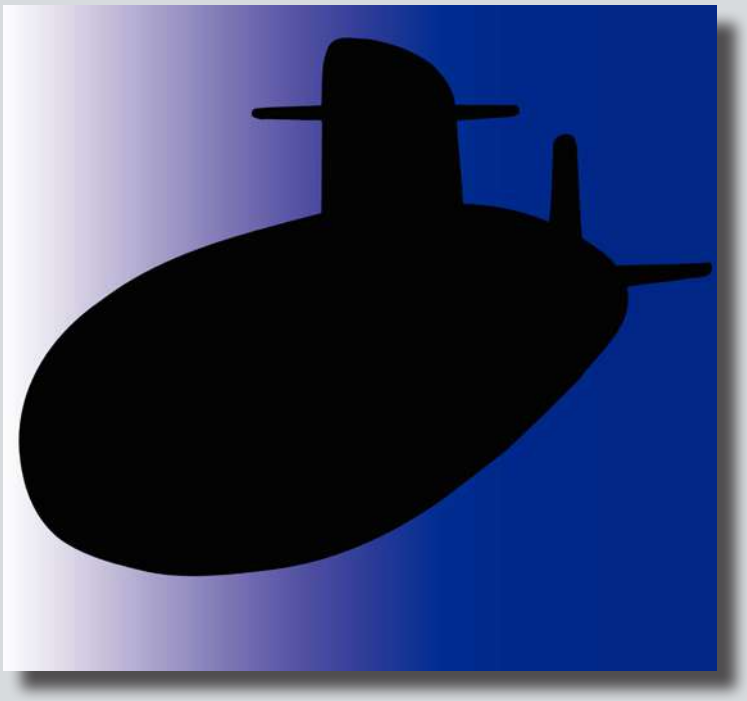

Defense:

- Site maintenance

SERCO: Equipment Designed for your On-Site Operations



Oil & Gas industry:

- Machining and resurfacing sealing surfaces.
- High-pressure valve maintenance



Hydro-electric power plants:

- Ultra-high precision bores for protection plate maintenance.



Shipbuilding:

- Machining sealing surfaces and bolt working surfaces.




Hoisting and Handling:

- For transport bucket repair and maintenance.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

NUCLEAR AND CONVENTIONAL POWER PLANTS

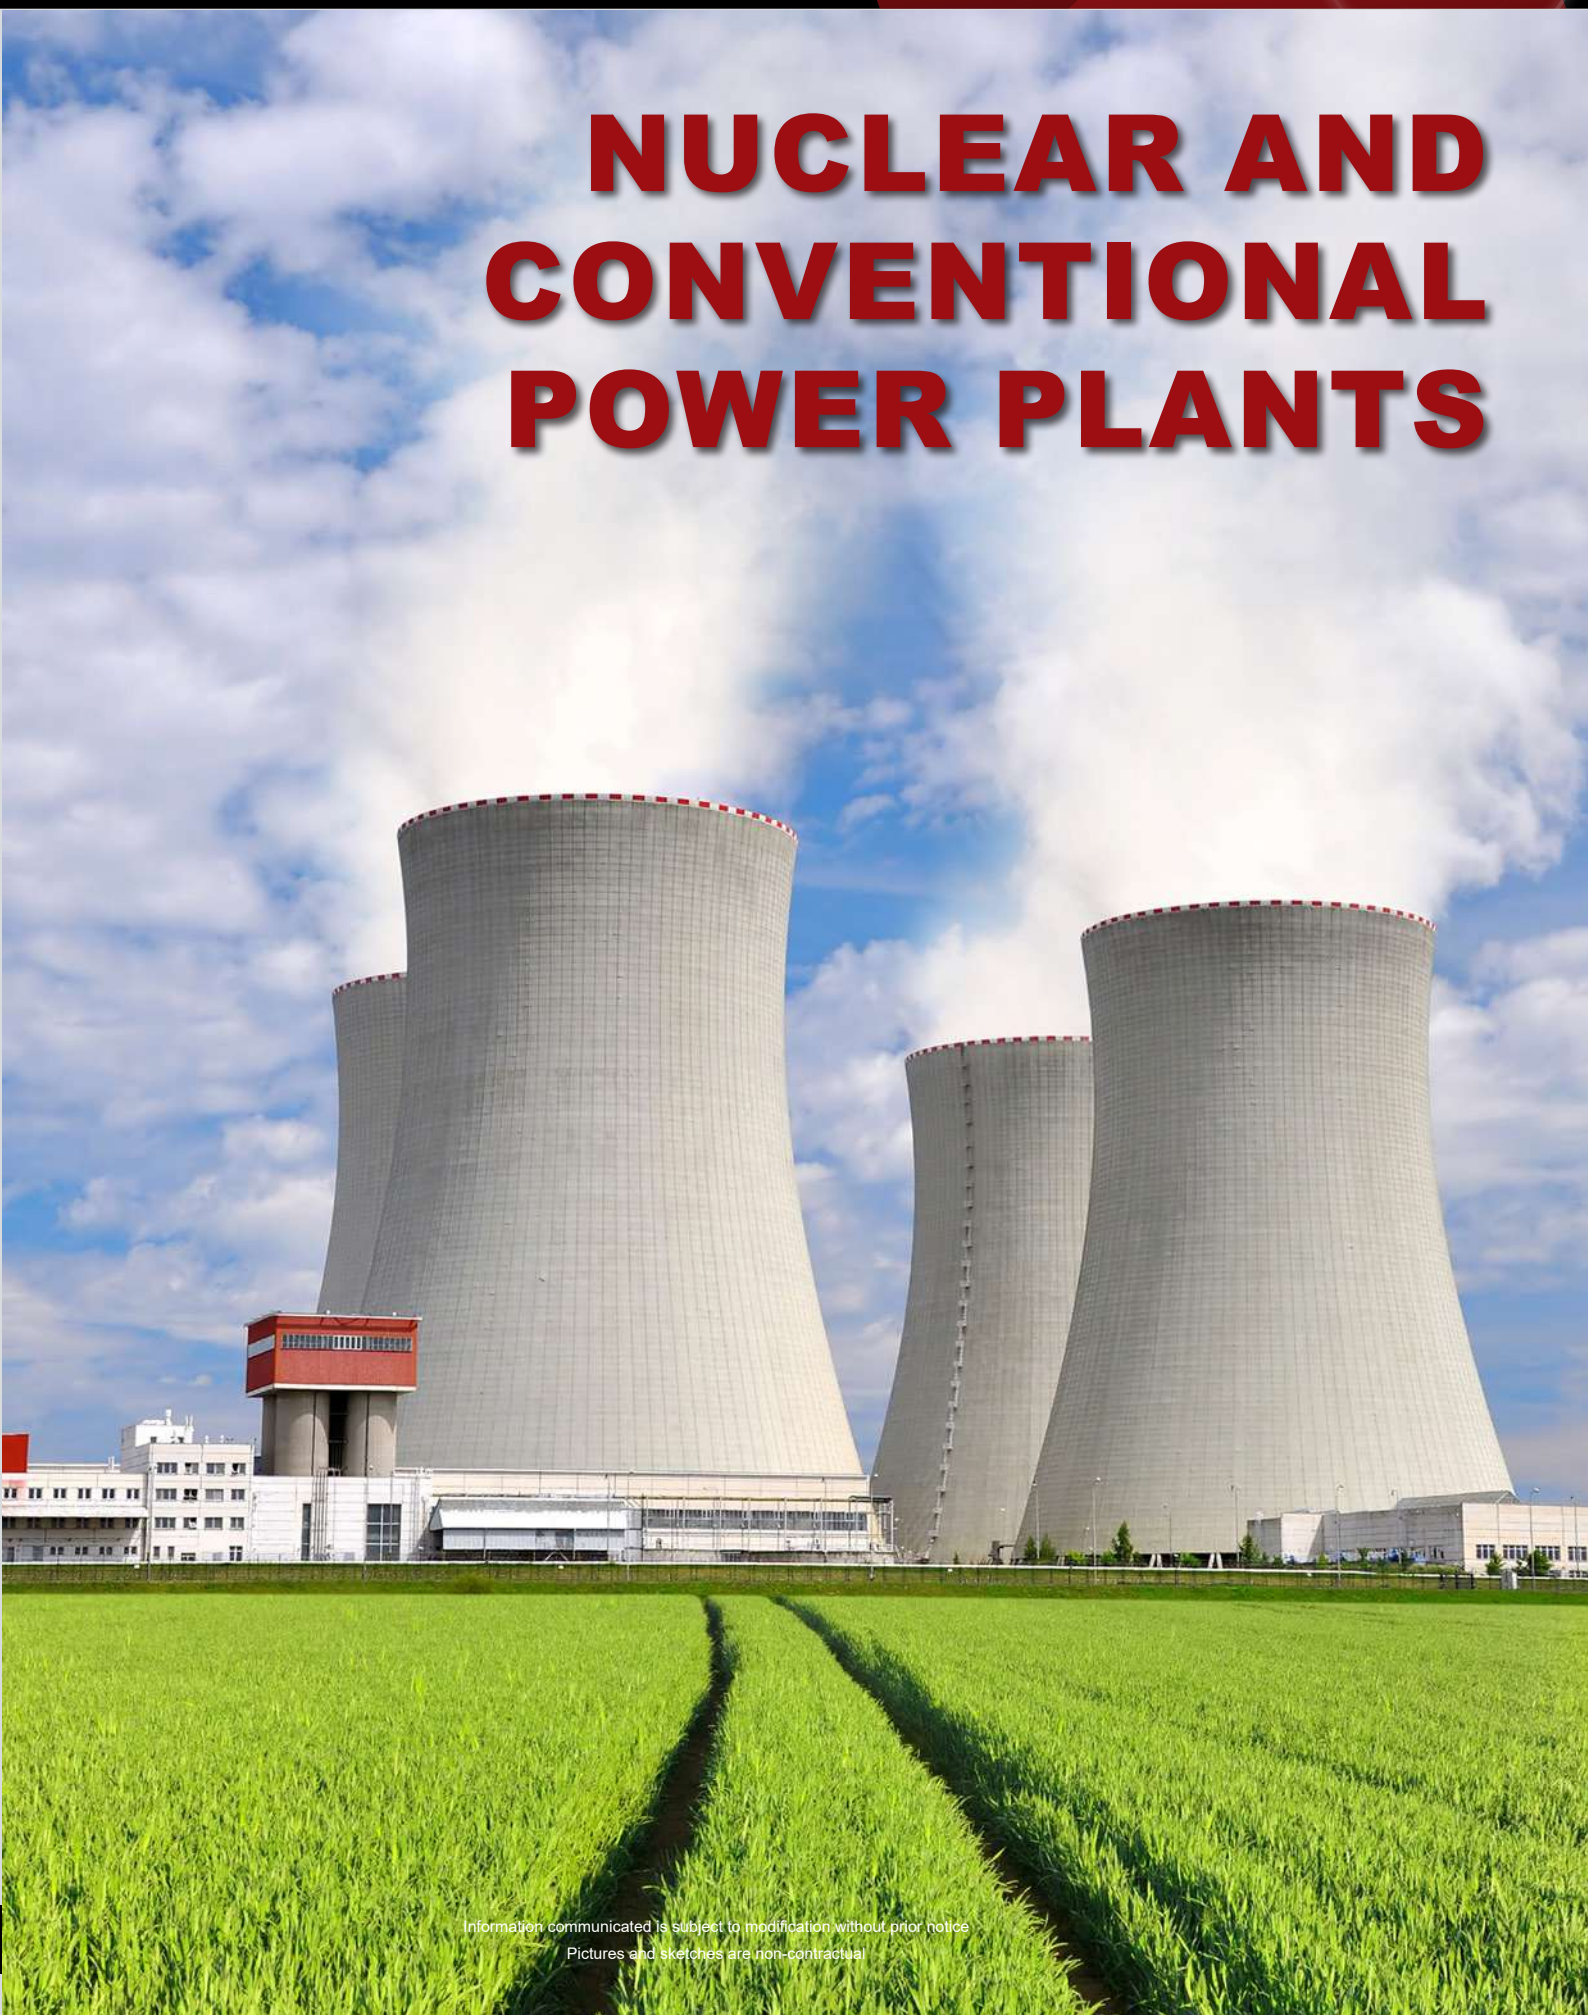

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

■ Nuclear and Conventional Power Plants



Reasons to Perform Machining On-site:

In a nuclear power plant more than anywhere else, piping and valve work are seriously put to the test. High pressures and important, continuous liquid flows cause components to wear more easily.

It is vital for these components to be serviced regularly in order to guarantee that the power plant can operate correctly. Whenever a flange or a valve has been identified as being faulty, two solutions exist: Either dismantle it and carry out repairs in the workshop or machine the part on site.

Where can a SERCO portable machining unit be used ?

SERCO machines are extremely versatile and their utilization capacities are unlimited. Even if they are mainly used for repairing flanges and different types of valves, they can also be used for a wide range of other applications. Here are a number of valves on which they can be used:

- Pressurizers: SEBIM valves
- Reactors: Stop valves, dampers, non-return valves
- Steam generators: Safety valves, high-pressure valves, MSS valves
- Turbines: Control valves, non-return valves, bores and couplings
- Condensers: Butterfly valves


Examples of applications:

With SERCO machines, components can be reconditioned even when sealing surfaces are seriously damaged.



Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

For over 50 years at the frontline of the Nuclear Industry

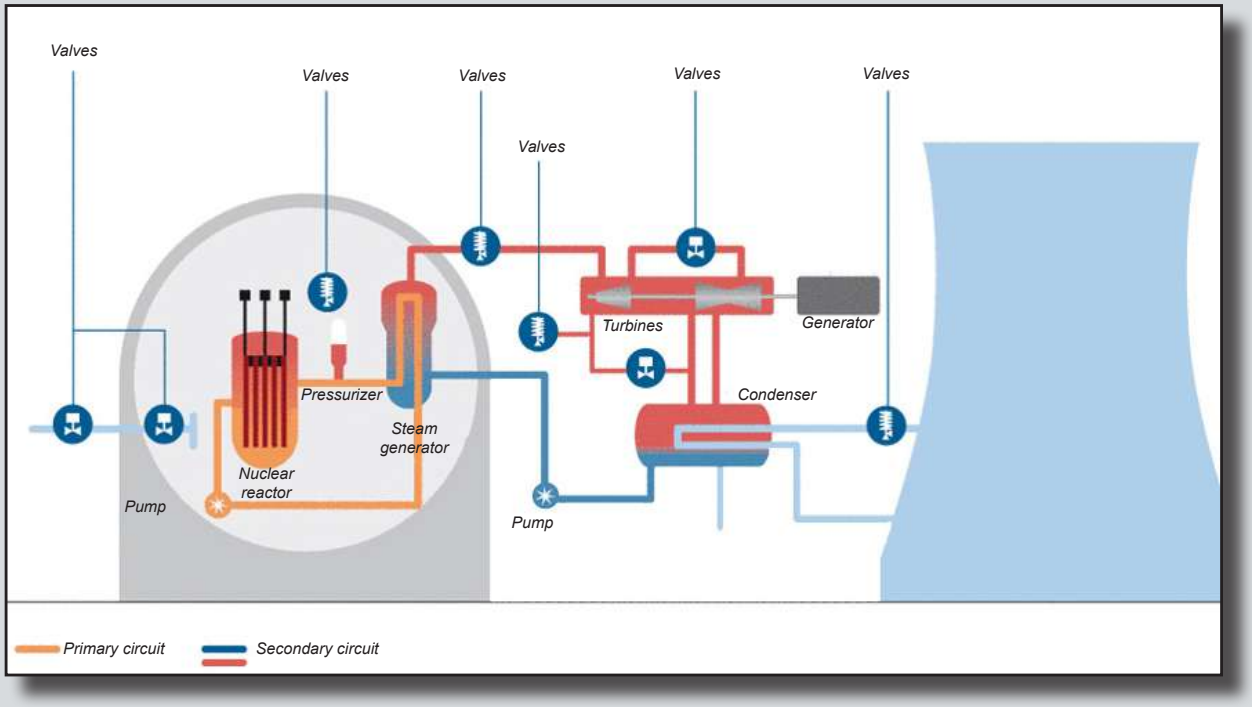

SERCO machines can be used on all valves for repairing sealing surfaces, bolt working surfaces or valve seats.

The primary objective when using a SERCO machine is to increase the service life of a flow control element by machining the parts worn by passing fluid. In this context, the machines can be used on the following types of valves:

- Gate valves: Machining sealing surfaces, bolt working surfaces and valve seats (parallel or tapered seats)
- Globe and ball valves: A type of valve often used in nuclear power plants they are to be found on the primary fluid regulation circuit. The TU200 is particularly suitable for this type of valve (flat seats). This is because it can machine all the sealing zones on the valve thanks to its compactness and machining capacities. For valves with tapered seats, a TU400 is a perfectly suitable solution with its combined feed system for machining conical forms.
- Check valves: Machining body-to-bonnet sealing surfaces + flanges
- Butterfly valves: Flanges for holding the valve where grooves are often made for the seals. High pressure valves: Machining body/bonnet sealing surfaces, an excellent surface finish is often required for the valve seat, which necessitates the use of a portable machining unit.
- Regulator valves: Often used for adjusting turbine pressures on the secondary circuit. Here too, SERCO machines are ideal for machining body/bonnet surfaces and flanges on each side (if the valve is bolted).
- Safety valves: Mainly positioned around steam generators or other pressure apparatus, SERCO machines are particularly suitable for resurfacing sealing surfaces and bolt working surfaces as well as valve seats. SERCO has also developed special tooling for machining MSS valves, the seats of which are often very deep. SERCO has also designed accessories for machining these seats, to which access is often difficult, (shortened columns, reinforced arm, special dowel pins, etc.)

OIL & GAS



Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

For over 50 years at the frontline of the Oil & Gas Industry

Dependable



SERCO provides industrial operators working in the oil & gas fields with integrated solutions for prefabrication, fabrication and maintenance work on flanges, valves and piping installations.


Where can a SERCO portable machining unit be used?

Suitable for all types of environments, including the most difficult and restrictive. Equipment designed by SERCO can be used in the workshop, on site, on ships, onshore and off-shore platforms, spoolbases, prefabrication workshops, etc.

Why should you choose SERCO equipment?

The SERCO portable machines have been designed to ensure perfect results for all your on-site machining operations.

Our equipment is designed to meet any operational requirement, for example, sturdiness, reliability, ease of use, ergonomic design, large capacity and a short machining time cycle.

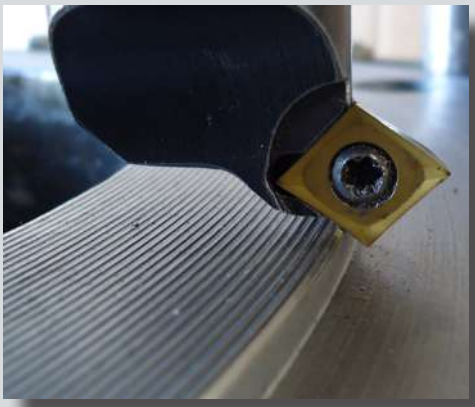




Machining of a 10” valve flange, stock finish sealing surface.

On-site Assistance:

SERCO operators are experienced technicians capable of assisting at your job sites, whatever and wherever they may be.



SHIP-BUILDING DEFENSE

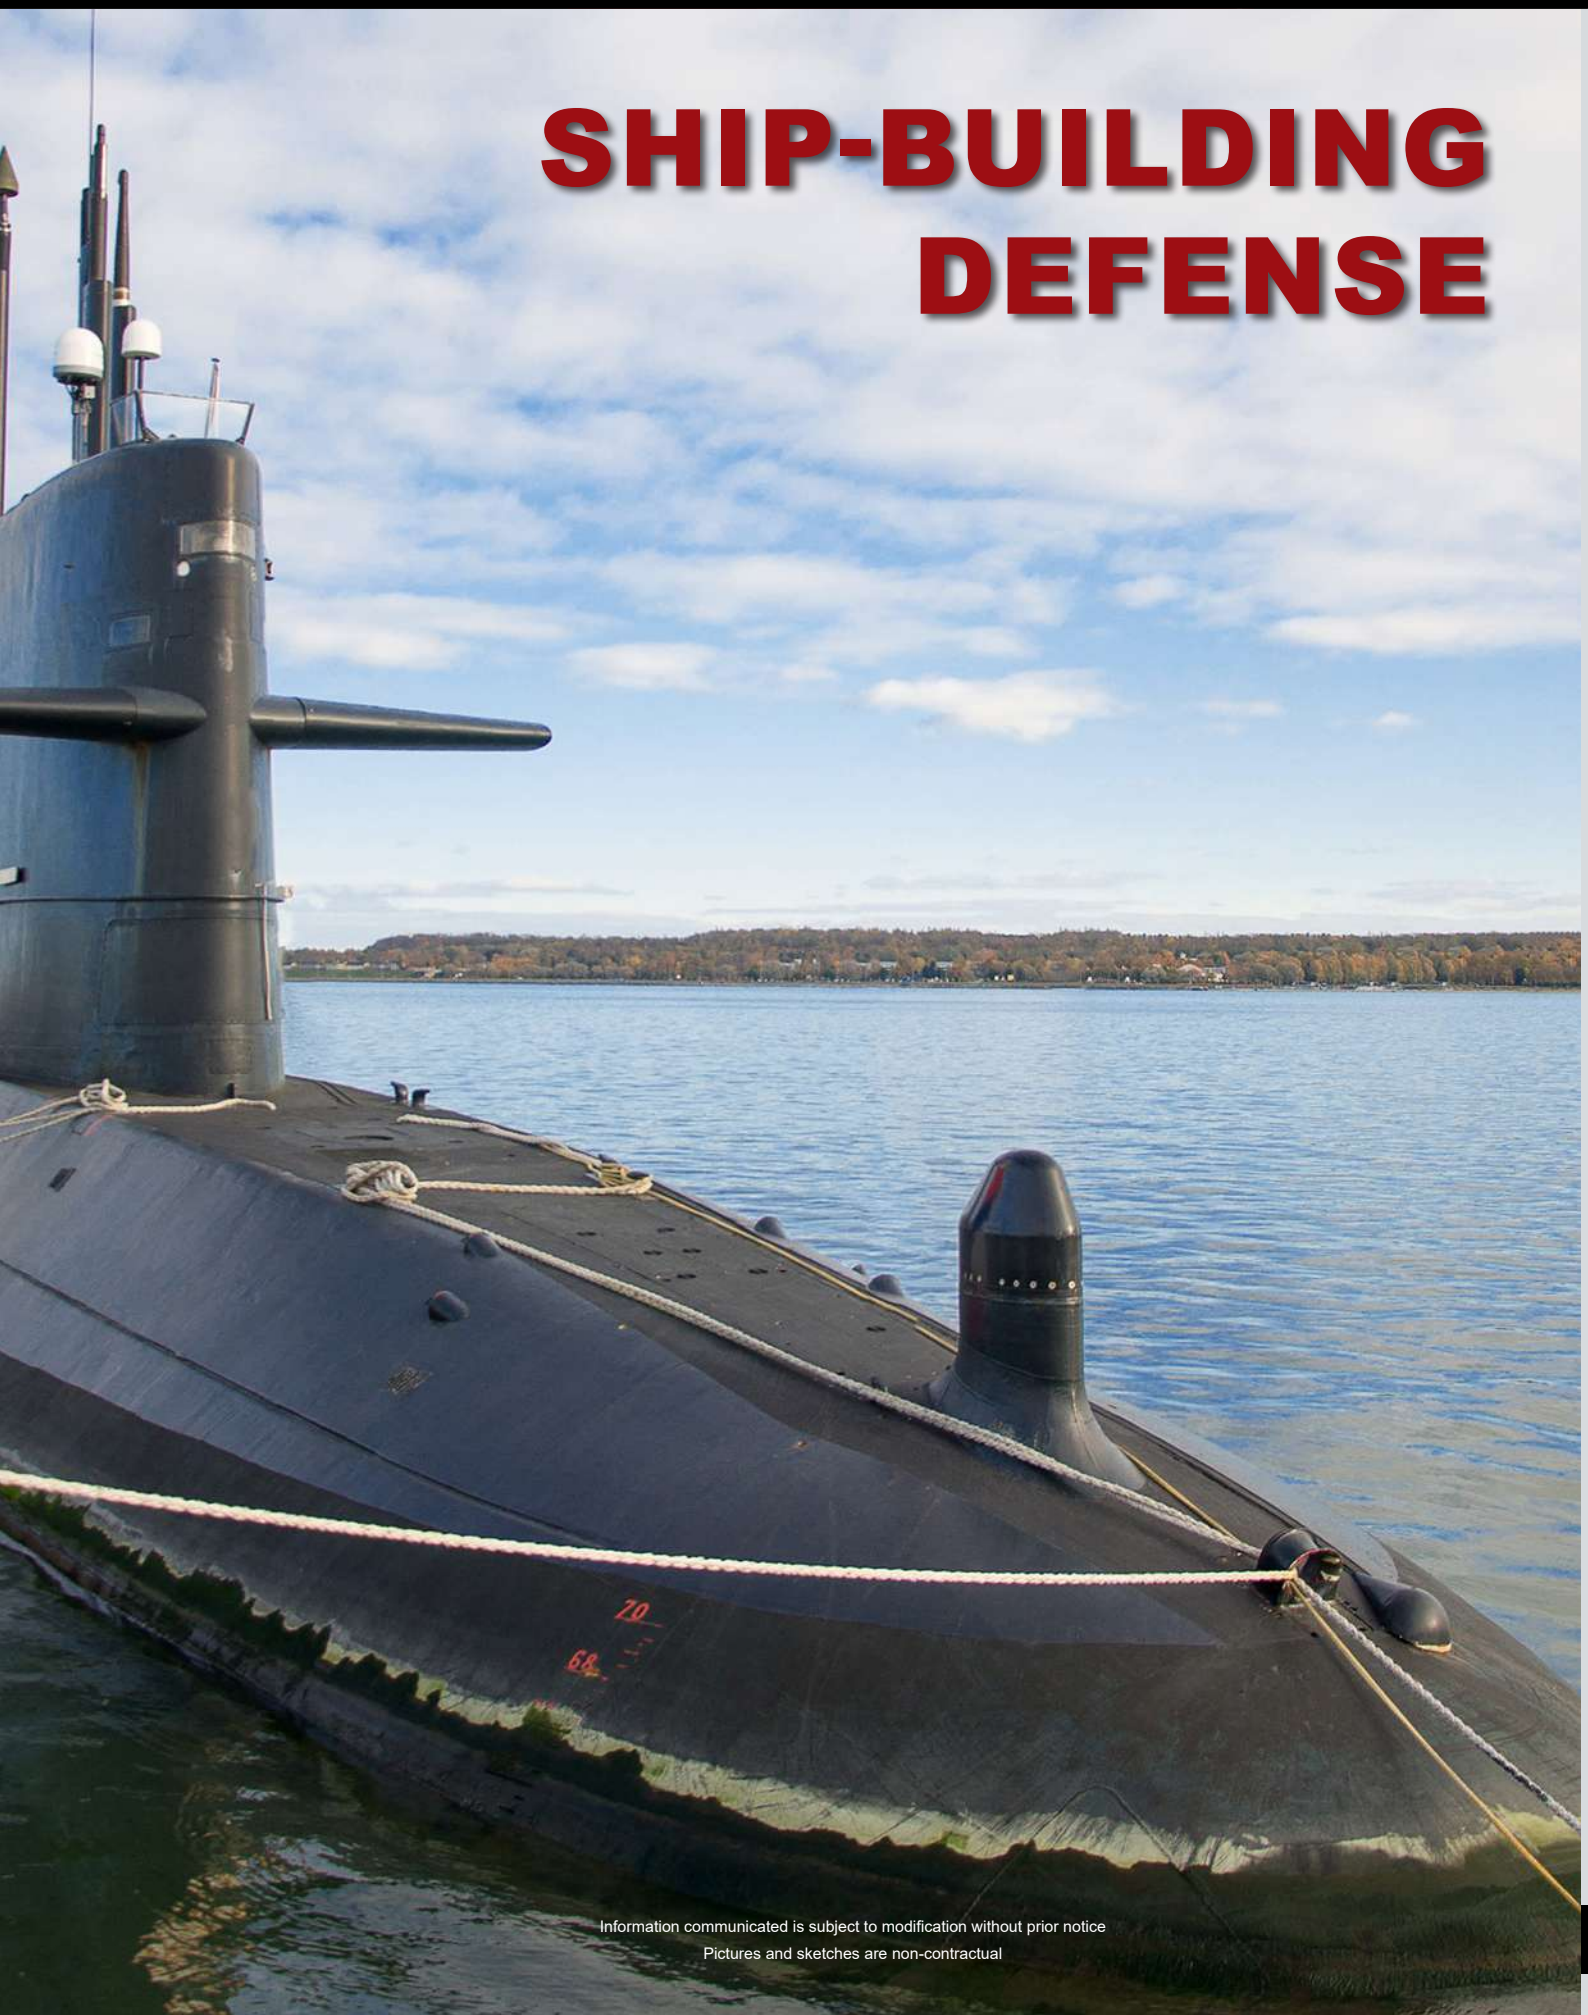

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual



Maintenance operations often prove to be delicate on board submarines and can sometimes last for several months. To avoid damage wherever possible, high-precision and rapid maintenance operations must be regularly carried out on the large numbers of flanges, valves and pipes.

Where can a SERCO portable machining unit be used?

Equipment designed and built by SERCO can be used in confined spaces and demanding environments.


SERCO has designed facing and boring machines for the navy (submarines, aircraft carriers) and merchant navy (cargo vessels, ferries, liners etc.). The SERCO machines used for military projects of this nature, cover a very wide range of diameters and can be used for many different applications.

Why choose SERCO equipment?

Our equipment is known for its quality, capability, ease of use, light weight and reliability. It is designed for high-precision machining operations. Equipment weight and dimensions enable it to be used in difficult work areas or under demanding conditions (ionizing radiation, extreme temperatures, etc.)

Examples of applications:

SERCO machines are particularly suitable for repairing diesel engines due to the dimensions of their boring stroke and the quality of surface finish they provide. In this way, they contribute to increase the service life of the engine and thereby contribute significant savings.

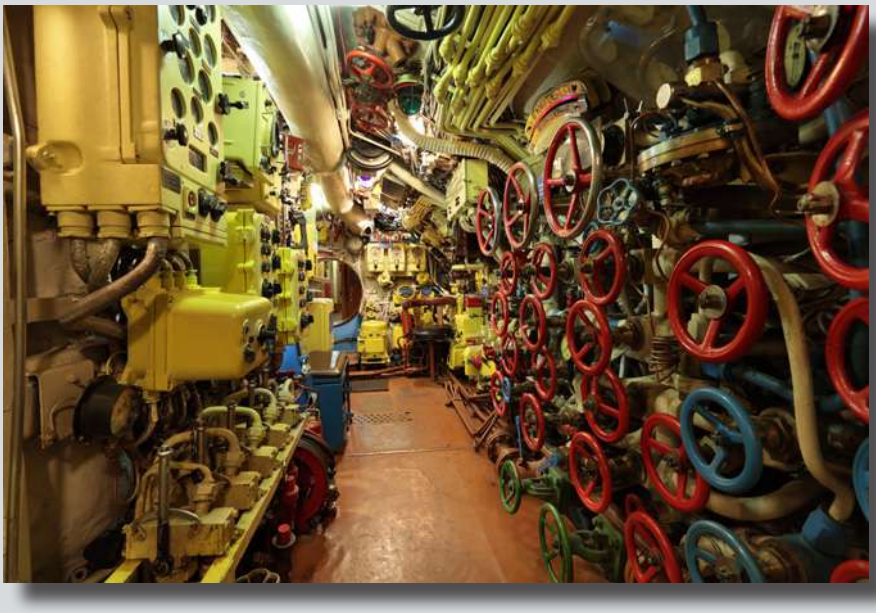

Examples of Applications

Check-valve machining in a nuclear power plant





Description: Repairing sealing surfaces and bolt working surfaces on a check-valve flange and the piping flange, following a distortion problem due to over-tightening. Machining outage units

O.D. 1150 mm (45.275”).

Tolerances to be maintained: 0.05 mm (.020”)

Machine: SERCO TU1200 attached to a FC 1150

Result: Machining completed in compliance with tolerances.

Boiler Applications





Description: Repair of three sealing surfaces on the head of a level probe installed on a boiler.

Using a clamping system specifically designed for the TU200.

Machining a few millimeters of a sealing surface, I.D. 69 mm (2.717”).

Rectangular outside surface of 100 x 95 mm (3.937” x 3.740”).

Machine: SERCO TU200 with special support

Result: In compliance with the stated requirements, less than 1 mm (.039”) was machined on the three surfaces.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Advanced Maintenance and Repair solutions

Ship-building





Description: Repairing two sealing surfaces and two grooves on two DN 250 STEEL flanges (I.D. 260 mm (10.236”), O.D. 405 mm (15.945”)), a DN 300 steel flange (I.D. 310 mm (12.205”), O.D. 460 mm (18.110”)) and three DN 350 steel flanges (I.D. 350 mm (13.780”), O.D. 520 mm (20.472”)).

Machining of sealing surfaces and bolt working surfaces, if necessary.


Flatness tolerance: Maximum 0.1 mm per meter (.004” per foot).

Surface finish tolerance: Ra must be between 6.3µm and 12.5µm

Machine: SERCO TU600 machining unit held in position with the FC 745 chain Clamping device.

Result: Machining done within dimensional tolerances and an Ra surface finish between 10.13 µm and 12.17 µm.

Machining in a paper mill

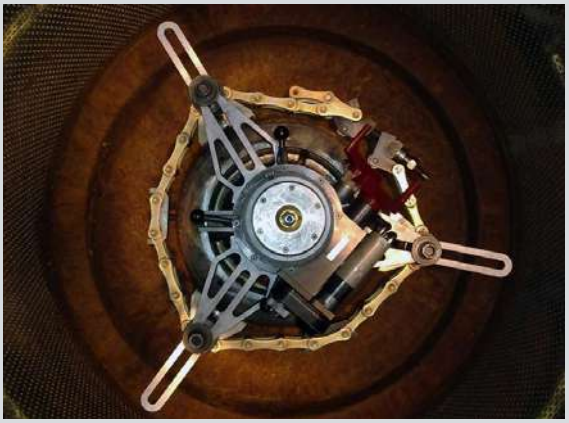



Description: Machining operations performed on a cast iron bearing on an “Aspiror” trunnion press.

Reducing the upper surface by 30 mm (1.181”) on an I.D. of 300 mm (11.811”) and an O.D. of 420 mm (16.535”). Boring over a depth of 107 mm (4.213”) to increase the I.D. from 300 mm (11.811”) to 340 mm (13.386”). Ra 3.2 surface finish required.

Machine: SERCO TU600 held in position with an FC 745 Chain Clamping device on the 420 mm (16.535”) diameter, which is slightly tapered.

Results obtained: Machining carried out within tolerances despite being performed on a material which was different from what had been indicated in the specifications. Molded steel with inclusion of sand vitrified by high temperatures.

It is to be noted that the operation was carried out in an extremely confined space where only a SERCO machine could be used due to its compact design.

Examples of Applications

Resurfacing a Corroded Flange






Description:

Resurfacing a flange for the elimination of defects.

Machine: SERCO TU1100 RTJ

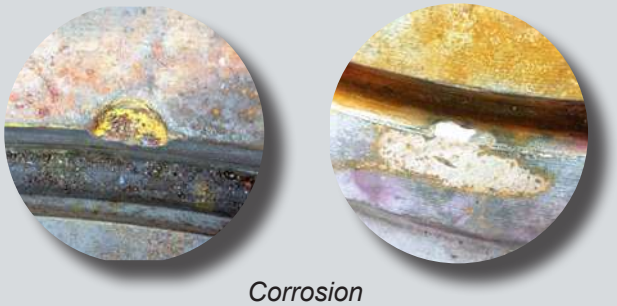

Corrosion

Machining a tank in a Chemical Plant





Description:

Machining valve seats (Ø 50 mm (1.968")) on two tanks on a chemical production line.

Material: Stainless steel (type: V4A)

Machine: Serco TU200

Result: Machining the valve seat to a depth of 100 mm (3.937") to install a new larger valve.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Dependable Component and Equipment reduce your operating costs

Machining a Wartsila Engine in an Electric Power Plant





Description: Intermediate boring with the SERCO TA 240/220/ME Boring Machine.

Result: Installed an insert on a Wartsila ZA 40 engine block.

Protection Plate Maintenance in a Hydroelectric Power Plant





Description: Boring 40 holes in a confined environment in order to enlarge them from a diameter of 213 mm (8.386”) to 217 mm (8.543”).

Material: Stainless nickel-chrome steel with a molybdenum additive.

Machine: Serco TU400

Result: Very high-precision bores. Final diameter 217 mm (8.543”) (tolerance: +0 to +0.046 mm (0.002”)).

Carbon monoxide compressor for the chemical industry



Description:

XP1800NG: use of a XP1800NG on a stainless steel flange with a diameter of 1730. On the left of the flange, machining of the seal surface with a concentric stock finish, on the right with a spiral wound gasket, in the middle with a smooth finish and on the RTJ groove walls with a 0.8 surface finish.

Examples of Applications

Flange repair in nuclear power plant


Description:

Description of works: Surfacing of the damaged seal surface after welding of the defects zone on a flange. The machining has been performed on an outlet flange of superheater thermocouples, with a SERCO TU200 unit.

Result: Seal surface in conformity with the tolerances



Flange repair in uranium conversion factory

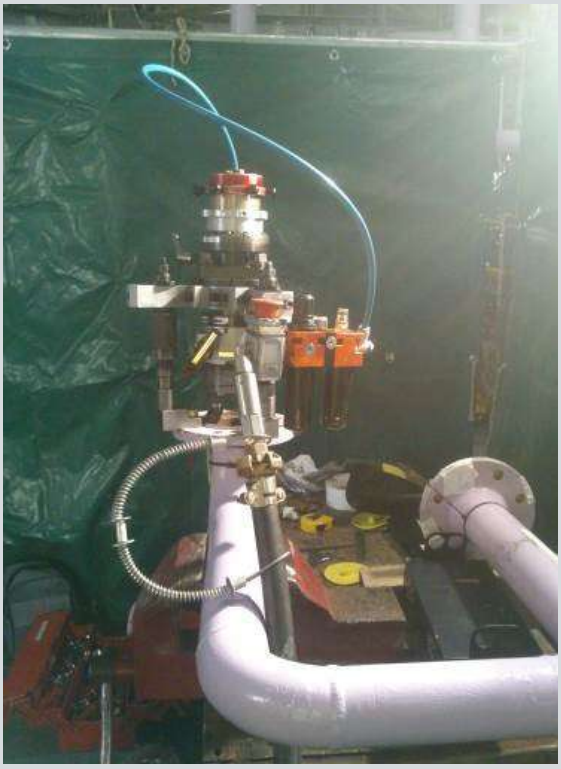



Description:

Description of works: Facing of seal surfaces on a spigot flange HF DN 15.The reparation has to be done with a SERCO TU200 unit because of a damaged part due to sandblasting cleaning.

Criteria for acceptance of repair: Whiten the seal surfaces by removing the minimum of material in order to stay in the tolerances of the flange.

Result: Roughness and dimensions of the seal surfaces in conformity after the intervention.

OFFSHORE equipment machining





Description:



Description of work: Repair of the seal surface on a 24” flange on burned gas recovery filter with concentric serrated surface, pitch of 0.5 mm with machining unit SERCO TU1100.

Result: Roughness in conformity with the request.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Best in class customer service

Seal surface reparation in a nuclear power plant

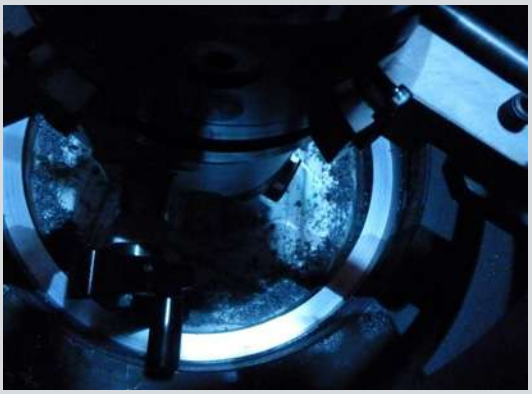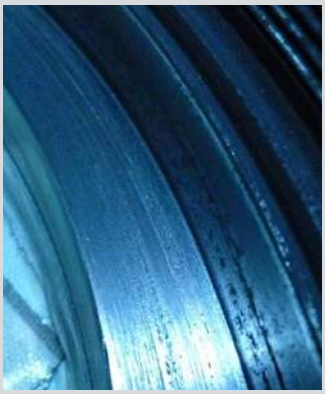Description:

Description of works: Machining of a seal surface at a depth of 543 mm on a "REG'S VALVES" body.

Result: Ra 1.2

Waste recycling plant




Description:

Description of work: Flanges seal surfaces machining on a frame and a metal crusher flap thanks to a machining unit SERCO TU1100.

- Roughness required: Ra 3.2.
- Frame machining Tolerance (parallelism): 0.5 mm

Result: Roughness and geometry in accordance with the request.

Piping machining in a workshop





Description:

Description of work: Inside counterboring with 14° slope thanks to a machnining unit SERCO TU1100, SERCO RTJ system and chain clamping device SERCO FC 1150.

Result: In conformity with the requirements.


The different Types of Valves

A valve is a device which stops or modifies the flow of a fluid. There are many different types of valves in the world. To provide a maximum sealing capability, certain parts of the valve such as the seat and the bonnet must be regularly serviced. On the following diagram the sections in red represent the surfaces that can be machined with SERCO units:

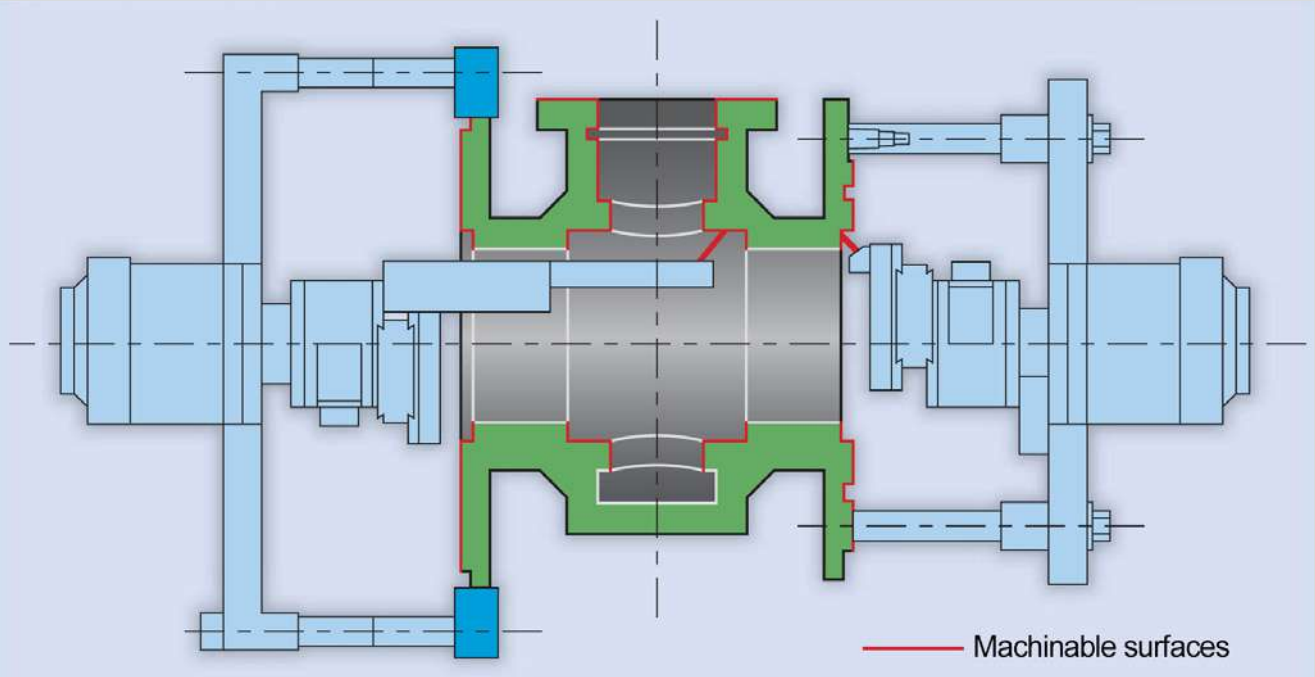

Different types of valves:

Ball Valves

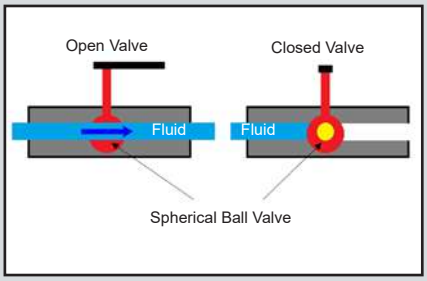


A ball valve is a device with an excellent opening/closing capability. The lever just needs to be rotated 90°.

When the ball is in line with the pipe, the fluid can flow. When it is turned 90° and perpendicular to the flow direction, the valve is closed and the fluid can no longer flow.

It must be pointed out that this type of valve is used to clean fluids (water, gas, oil) in sectors such as energy transmission and storage, the gas industry and water treatment.

Butterfly Valves

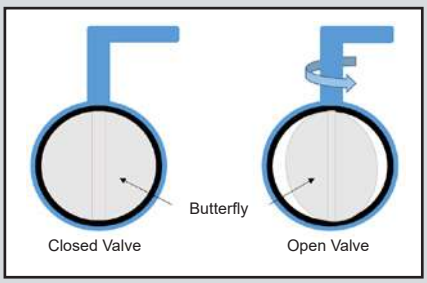


The main function of a butterfly valve is to control the liquid flow through a section of piping. The most important part of the valve is the metal disk. The butterfly (disk) is mounted on a rod. When the butterfly disk is closed, it prevents the fluid from flowing. When the disk is fully open the butterfly turns 90°. The passage is now free and the fluid can flow.

Butterfly valves are used in chemical, pharmaceutical, and food processing industries for stopping the flow of water, compressed air or gas.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

The different Types of Valves

Non-Return Valves

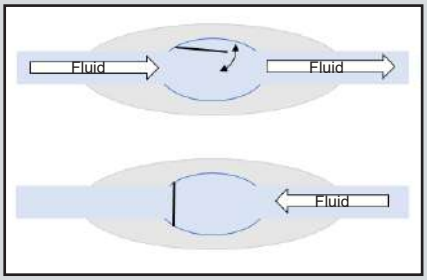


Non-return or check valves enable fluids to circulate one way only and they close automatically to prevent any back-flow (which avoids gas blow-backs for instance).

The degree to which the non-return valve opens depends on the flow. The higher the flow, the more the valve is open. If the pressure increases down the line from the valve and is higher than the pressure up the line from the valve, the system closes automatically.

Non-return valves are more often used in nuclear power plants due to their light weight and compact design. They can also be used underwater in difficult and restrictive conditions and in the presence of very high pressure and low temperatures.

Throttle Valves

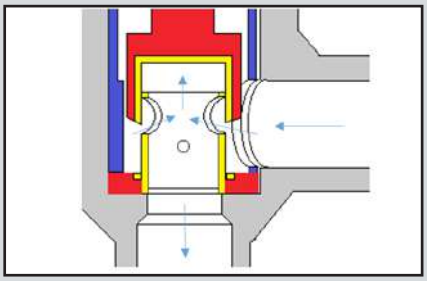


The purpose of throttle valves is to limit the flow of a fluid (Venturi effect) and in this way accelerate its speed when leaving the valve.

These types of valves are specifically designed for the oil and gas industry in order to control the flow of oil coming from the substratum via the wells.

Oil wells require regular maintenance (facing) for their throttle valves due to the erosion phenomena that occur as a result of extreme conditions (especially low temperatures).


Diaphragm Valves

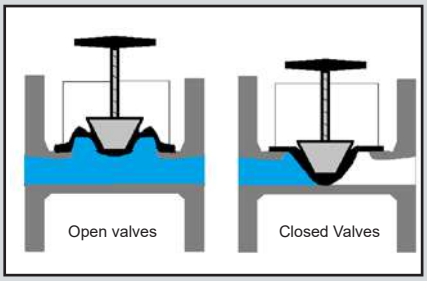

The diaphragm (made of rubber or plastic) pushed down by the bonnet makes contact with the valve seat and forms a seal.

This type of valve is ideal for controlling the flow of fluid that contains solids in suspension as well as corrosive or abrasive fluids. Initially, diaphragm valves were developed for industrial applications. Later, their design was modified for use in the pharmaceutical industry using materials capable of resisting different methods of disinfection and sterilization.


Gate Valves

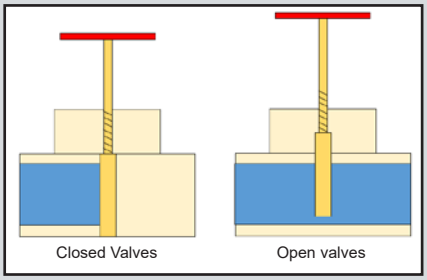

In a gate valve, the fluid flow is regulated by the valve door being fully closed or open. When the valve is closed, the door is completely shut and no fluid can flow through. On the other hand, when the valve is open, the door is raised, which means that nothing can prevent the fluid from flowing through.

This type of valve is used in a large number of industries, particularly food processing and pharmaceutical. They are ideal for liquid fluids.

Pressure Retaining Valves / control valves

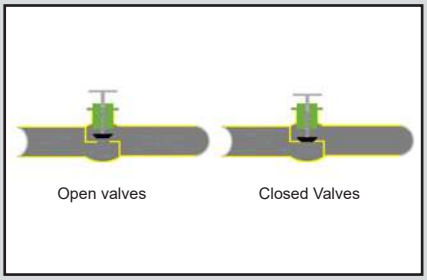


This type of valve is suitable for adjusting fluid flows. Pressure retaining valves are operated by a hand wheel. When the gate is pushed tightly against the valve seat, the valve is closed. When the gate is not held against the seat, the valve is open.

The valve rod must be rotated frequently for opening and closing the valve. As a result, the seal is often prematurely worn.

Pressure retaining valves are suitable for a wide range of applications from flow regulation to noflow conditions.


The different Types of Valves

Needle Valves

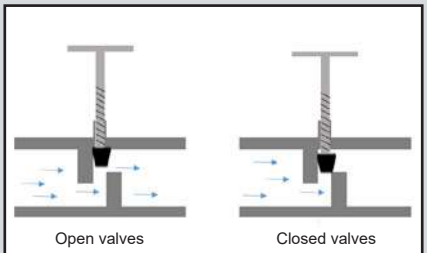

Needle valves are used for regulating flows on lines of thin piping, which they can control very accurately. The size of the port that allows the fluid to flow through is modified depending on the position of the needle in relation to the valve seat. Needle valves are often simply used as block valves in central heating systems. They can also be found in various industrial applications (food processing, chemicals, paper-mills, etc.)


Pinch Valves

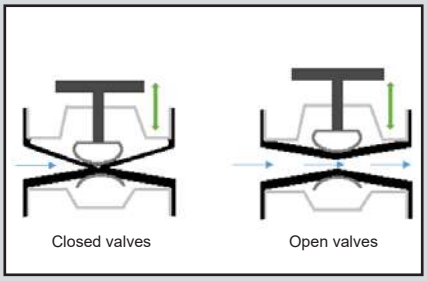

The principles of operation for a pinch valve are simple: When open, the valve becomes a full port valve, without any flow restriction. When closed, two pinching bars compress the sleeve in the middle of the valve.

Pinch valves are ideal for applications regulating or blocking flows of abrasive or corrosive sludge, powder or granular substances.

Ball Valves

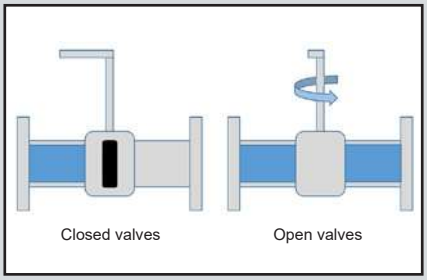


Ball valves are fitted with a spherical ball bored with a hole often the same diameter as the valve bore.

Multiport ball valves enable the fluid to take different routes when entering or leaving the valve.

Ball valves can be used for regulating the flow of fluids containing abrasive particles, up the line to gas pipelines requiring bypass valves.

Safety Valves

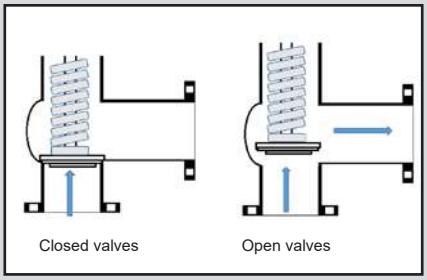


Safety valves are automatic valves designed for opening and evacuating fluids automatically when pressure attains a predefined level and closing again when the pressure drops.

These valves are used for steam, air, water and other non-hazardous fluids on pressure boilers or steam transport conduits for instance.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Flanges and Sealing Surfaces



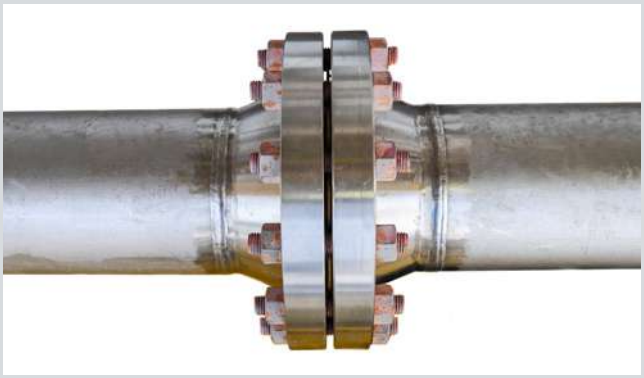






A flange is a disk, collar or ring connected to a pipe to form a link with other piping elements (valves, other pipes, etc.) or to block off a part of the piping. Flanges are normally welded or screwed onto pipe ends and connected together by bolts. A gasket or seal is inserted between the two flanges to make sure that it is liquid or gas tight. Several official organizations have published specifications (ANSI, ISO, etc.) which supply information on dimensions and pressures to be taken into account depending on temperatures.


Different Types of Flanges

Slip-on Flanges

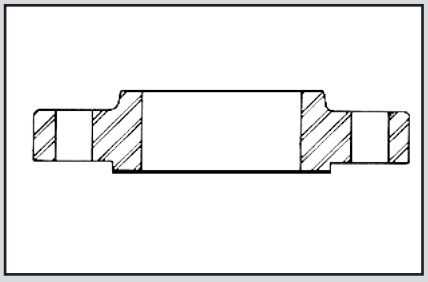

This type of flange is machined with an ID slightly larger than the pipe OD. This enables the flange to slide along the pipe, but it remains close to the pipe surface at the same time. Flanges are then held in position by welding them at the top and bottom.

Welding Neck Flanges

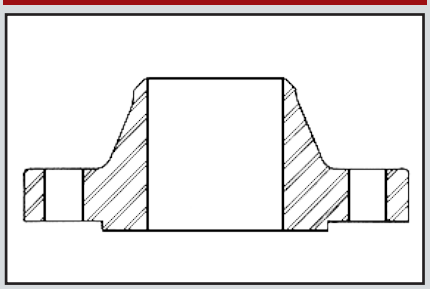


These flanges are held by welding the pipe onto the neck of the flange. This enables any stress on the flange to be transferred towards the pipe and to reduce stress concentrations on the base of the flange. Welding neck flanges are often used for high pressure applications. The flange I.D. is machined to match the pipe I.D.

Flanges and Sealing Surfaces


Different types of flanges

Blind or Blank Flanges

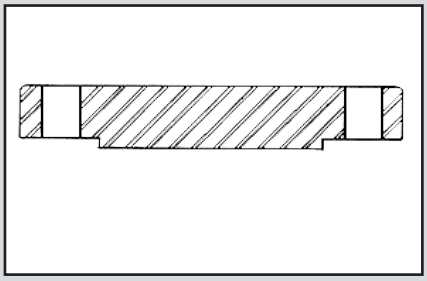


Blind or blank flanges are used for sealing the end of a piping system or a pressure tank. They are also used for testing gas or liquid pressure in a pipe or a tank. This type of flange also provides easy access inside piping whenever required. They are used for high pressure applications.

Overlapping Flanges

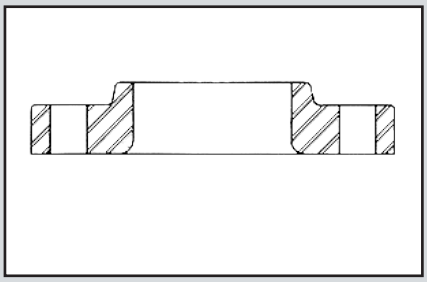


Overlapping flanges slip onto pipes and are often used with collared pipes. The collar or rim is welded onto the pipe and the flange rotates freely. The advantage is that no problem can arise when aligning bolts. These flanges are often used for applications requiring frequent dismantling. They are also used when pipes are made of hard or exotic materials. Generally, the flange itself is made of steel. The flange I.D. is machined to correspond with the size of the collar.

Threaded Flanges

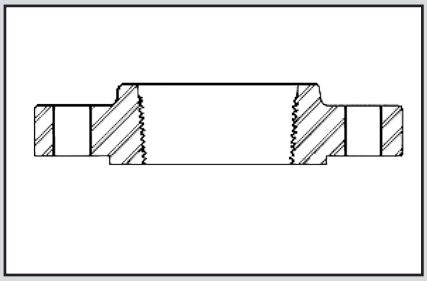

Threaded flanges can only be used with threaded pipes. Their advantage is that they can be connected without welding. These flanges are often used with small diameter pipes at high pressure.

Socket Weld Flanges

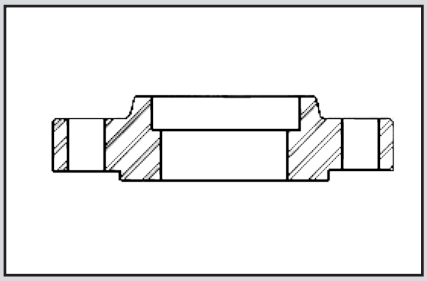


Socket weld flanges are normally used with small diameter pipes and in high pressure environments. Flanges are held by inserting the pipe into the flange and welding the top of the flange on the outside. This enables the inside of the pipe to be kept smooth so that the fluid or gas can circulate more easily.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Flanges and Sealing Surfaces


Different types of Flange Sealing Surfaces

Raised Faces

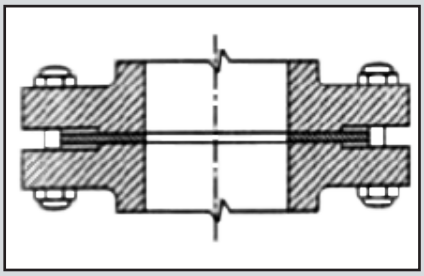

Raised face flanges are the type of flanges most commonly used in treatment plants and are easy to identify. Their name comes from the fact that the contact surface is raised in comparison with the face where the bolt holes are located. This type of flange enables a wide range of different seals to be used. High pressure can be exercised on a small contact surface and in this way, the fluid-containing capacity of the seal is increased.


Flat Sealing Surfaces

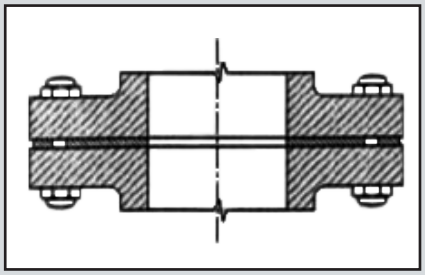

Flanges with flat sealing surfaces have a contact surface that is on the same level as the surface where the bolt holes are located. This type of flange is often used where flanges are cast.


Flanges with flat sealing surfaces are never used together with flanges that have raised faces.

RTJ Joints

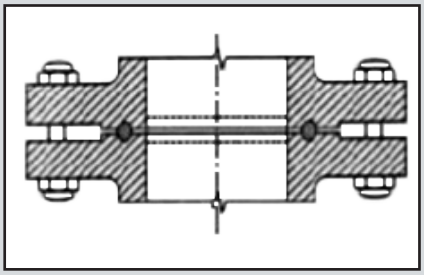

RTJ joints are used for high pressures (Class 600 or over) and/or high temperatures (above 427°C (882°F)). They feature machined grooves in which a metallic ring joint is fitted. When the bolts are tightened, the metal joint is compressed between the two flanges and is deformed so as to create a metal-to-metal contact. An RTJ type flange may have a raised face with a machined groove. But this face does not play any role in the sealing capacity of the unit.

Tongue and groove flanges

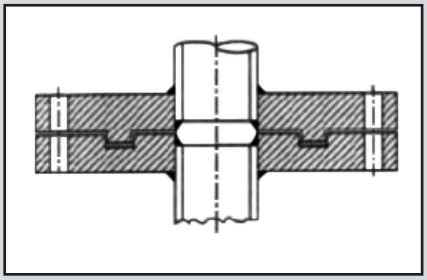

Tongue and groove flanges have faces that need to be used in pairs. One of the flanges has a machined groove in its bearing surface, while the other has a tongue that is inserted into the groove. They are often found on pump covers and valve bonnets.

Their advantage lies in the fact that the two flanges are automatically aligned and form a reservoir for bonding. Moreover, the wedge seal maintains the load axis in line with the seal.

RTJ and T&G flanges must never be mounted together. This, because their contact surfaces do not correspond and no seals exist whose shape corresponds to one type of flange on one side and another type of flange on the other.

■ RTJ Metallic Ring Joints


Metallic ring joints, normally referred to as RTJ (Ring Type Joint) are mainly used in the petrochemical industry (offshore and onshore) for high pressure applications, high temperatures and corrosive environments.

These metal joints designed to set standards, are used with flanges that have precision-machined grooves. This association provides maximum sealing capacity for the unit.




Different categories of RTJ:


RTJ type R

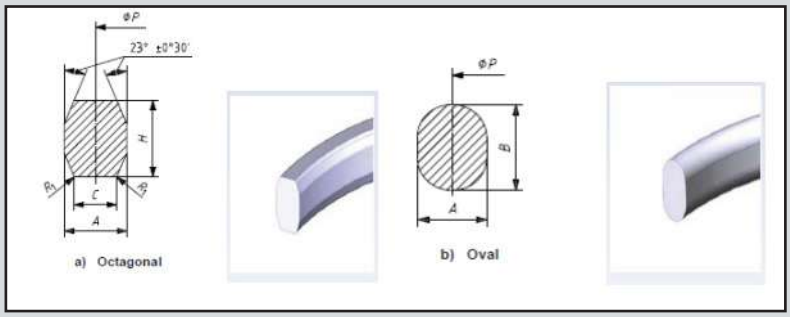

RTJ type RX

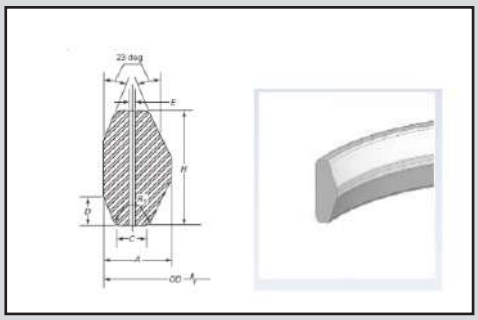

RTJ type BX

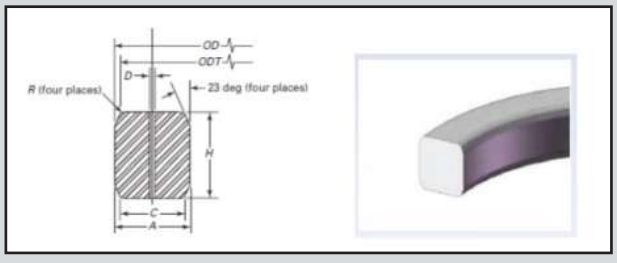

API 6A, ASME B16-20, NF EN 12560, ISO 10423 standards govern the design and production of RTJ. RTJ are classified in three main categories - R, RX and BX - depending on the cross-section of the metallic ring. Every dimension is accurately determined by the standards referred to above.

Other designations such as SRX and SBX also exist for subsea applications or even IX for seals suitable for compact flanged connections.

As the design of these joints is governed by standards that impose extremely strict dimensional tolerances, the groove receiving the joint must also be machined extremely accurately. Otherwise the ring will not fulfill its sealing function.

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

■ RTJ Metallic Ring Joints

Machining RTJ grooves with SERCO Portable Machines:

Using suitable machine tools is of key importance in the groove machining process. All types of RTJ grooves can be machined with SERCO portable machines, on site or in the fabrication workshop with the same accuracy as for workshop machine tools.

RTJ groove - gorge



Moreover, a sealing surface that is worn , corroded, pitted or with a poor surface finish will also make an RTJ loose its sealing properties. As SERCO machines can be used in all situations, they can be used for repairing RTJ grooves directly on site, where the flange does not need to be removed from the installation. This avoids costly repair operations for industrial operators in their workshops (cutting out, transport, machining on a workshop tool, welding, etc,) or replacing the defective flange.

SERCO TU machine on-site



SERCO TU flange facing and boring machines can be fitted with two types of systems for machining RTJ grooves.

The SERCO RTJ system combines the two axial and radial feed movements of the machine by a gear system. The tool moves at a preset angle (23° or any other angle if required), which enables tapered grooves to be machined.

The SERCO RTJ system is comprised of:

- An angular gearbox fitted to the boring head rapid return.
- A universal joint for transmitting the rotation movement in a vertical plane.
- A gear/wheel assembly. The universal joint drives the gear. The wheel is positioned on the machine vernier scale support.
- A clutch system enables the gear to be engaged on the wheel for generating the down-feed movement.



System RTJ



SERCO AC 38



The SERCO AC 38 system with a head fitted on the end of the angle to adjust for machining grooves at angles from 0° to 180°.



■ Portable Machining Units

For Beveling, Facing and Cutting Tubes and Pipes.

ID Clamping Machines

SM8 Beveling Machine



S18 Beveling Machine



S18CA Beveling Machine



US25CH Boiler Pipe Beveling Machine



US25CA Boiler Tube Beveling Machine



US25TP Boiler Tubes Beveling Machine



US25TA Pipe Beveling Machine



US25GL Saddle Beveling Machine




US30CH Beveling Machine



US40 Beveling Machine



US40CA Beveling Machine



US80 Beveling Machine



US150 Heavy Duty Beveling Machine



US450 Heavy Duty Beveling Machine for Large Diameters



Facing and Machining Flanges and Valves



US Series – Elbow Mandrel Assembly



FBB Elbow Bench Bevelling Machine



PFM Equipment for Pipelines



US600-R Pipe Beveler for Very Heavy Wall Thicknesses



Coating removal



Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Portable Machining Units

For Beveling, Facing and Cutting Tubes and Pipes.

OD Clamping Machines

OHSB Series



US1



US3



US6



UG1



SE Series




SL Series



SE-NG Series



BMFM Series



GR Series



TTS-NG Series



TTS-RD Series



TTNG-LW Series



TTNG-HD Series



TNO Series



MF Series



OCM



BB Series




CTA Series



SPECIAL MACHINING EQUIPMENT





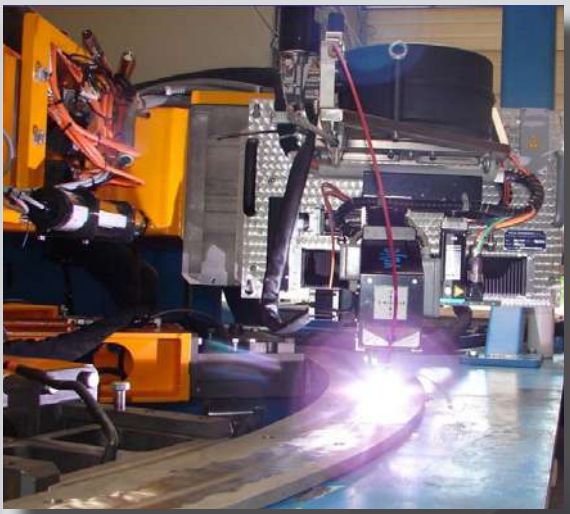

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Special Machines

Tube and Pipe Machining- Construction / Maintenance / Repair

The SERCO Advantage:

• Responsiveness and the capacity to meet deadlines.

For over 50 years SERCO has been designing and building special units to machine flanges and valves in order to meet essential technical requirements for specific applications. Our engineers and technicians work with your industrial projects, from equipment design to installation in your workshops or on your job sites.
Our knowledge and expertise are made available to our industrial partners throughout the world. Our engineers and technicians offer you the benefits of their technical expertise and their understanding of major project factors so that they can propose the right solutions.

Expertise – Knowledge - Skills - Quality - Reliability – Industrial Performance

SERCO has designed and built over 1500 special machines over the last 50 years for applications in different fields, such as:

- Construction
- Prefabrication
- Maintenance and Repair

Nuclear power – Oil & Gas – Chemical – Green Energy – High Purity – Aerospace - Construction – Ship-building – Defense ...

• Our Service Offer Includes:



- Planning and modeling operations specific to each project
- Technical assistance as project stages progress
- Installation of equipment on site
- Operator training
- Permanent industrial consultation

• Professionalism and Partnership:

Our engineers and technicians benefit from a number of years' experience in the fields of mechanics, electronics, radiation protection, site organization, constraints related to certain projects, on-site machining, etc.

SERCO commits itself to complying with safety and hygiene obligations concerning the sites where it is working, in any industry, as well as, with the regulations and standards in force in terms of safety and security.





Describe your Application

We thank you for the interest you have shown in SERCO. In order to reply to your request as efficiently as possible, we request that you define your requirements, by providing the following details:

Your name and address:

Company: .....
Field of business: .....
Number of employees: .....
Address: .....
.....
.....
Country: .....
Name of contact: .....
Department: .....
Position: .....
Phone: .....
e-mail: .....
Website: .....

Your requirement:

1) What type of component needs to be machined?

.....

2) What material is the component made of? (please indicate the reference)

.....

3) What are the flange/valve diameters?

3.1) What minimum and maximum O.D. must be taken into account?

ø from ..... to .....

3.2) What minimum and maximum I.D. must be taken into account?

ø from ..... to .....

(Could you send us a table for identifying the number of flanges/valves and their relative dimensions?)

4) What type of machining needs to be done on the flange/valve?

☐ Surfacing ☐ Boring ☐ Facing & Boring ☐ Other

5) Depth of machining? (specify units of measurement)

from ..... to .....

Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

Please draw the profile of machining to be completed here, together with its dimensions (specify the unit of measurement):

6) How is the machining operation completed presently?

.....

7) Where is the machine intended to be used?

☐ **On-Site** ☐ **Workshop**

8) What type of drive is needed?

☐ **Pneumatic** ☐ **Electric** ☐ **Hydraulic**

9) What clamping possibilities exist?

☐ **Inside clamping** ☐ **Outside clamping**

10) What level of automation is required?

☐ **Manual** ☐ **Semi-auto** ☐ **Auto**

11) What machining tolerances are to be taken into account?

.....

12) How many machines do you wish to purchase?

.....

13) What is the schedule for your project?

.....

14) Your comments:

.....

OUR COMMITMENT! YOUR SATISFACTION!

Our Mission: To be the key partner for our customers, providing them with our experience, expertise, efficiency and reliability for their worldwide industrial machining projects. We design tailored solutions adapted to your machining needs on any kind of valves and flanges.





Information communicated is subject to modification without prior notice
Pictures and sketches are non-contractual

CONTENTS OF THE PRESENT CATALOGUE

We pay attention to the contents of this catalogue. Nevertheless, and despite a regular update, some mistakes are not excluded.
In this catalogue, the contents are only for information purpose and do not have obligatory nature. Moreover, the contents are subject to modifications without prior notice.
The Manufacturer, also called the Seller is not bound by a result obligation related to them and is only supposed to sell and deliver the products.

Intellectual property and counterfeitings:

The Manufacturer, also called the Seller is the owner of all intellectual property rights and/or of the use rights related to all the catalogue's contents, notably the texts, pictures, drawings, logo.
All copy, representation, modification, publication, adaptation of all or part of the catalogue's contents, whatever the means or process used, is forbidden, except with the prior written agreement of the Manufacturer, also called the Seller.
Any unauthorised use of this catalogue or of any contents from it will be considered as a counterfeiting and will be prosecuted according to the provisions of related articles of the Intellectual Property Code.










THE FUTURE OF ON SITE MACHINING

SERCO

Germany
Am Hambiegel 27
76706 Dettenheim | DE
Phone: +49 (0) 7247 9393 – 0
contact@serco-tools.com
www.serco-tools.com

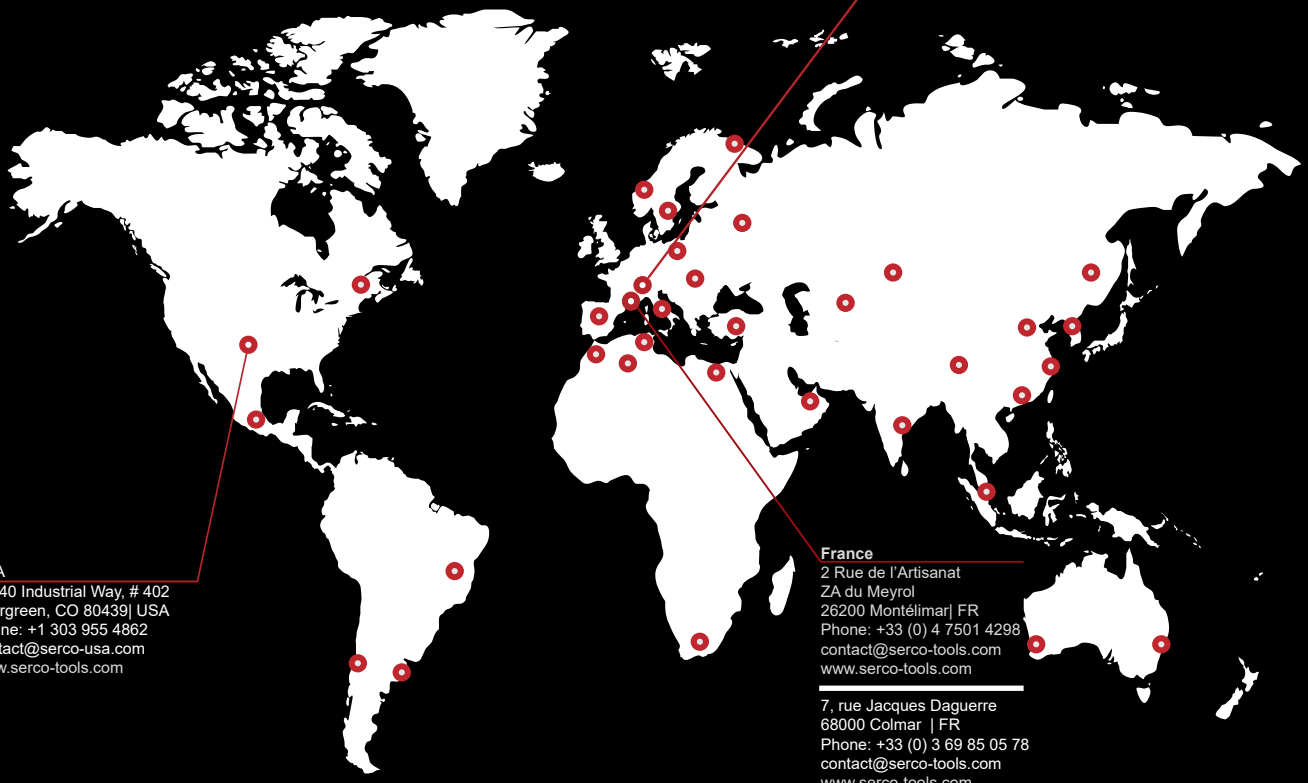

USA
29340 Industrial Way, # 402
Evergreen, CO 80439| USA
Phone: +1 303 955 4862
contact@serco-usa.com
www.serco-tools.com

France
2 Rue de l'Artisanat
ZA du Meyrol
26200 Montélimar| FR
Phone: +33 (0) 4 7501 4298
contact@serco-tools.com
www.serco-tools.com

7, rue Jacques Daguerre
68000 Colmar | FR
Phone: +33 (0) 3 69 85 05 78
contact@serco-tools.com
www.serco-tools.com





